



Keep in Touch

联系我们

江苏省常州市钟楼区邹区工业大道新西路6号, 213144
#6, Xinxi Rd., Zouqu, Zhonglou, Changzhou, Jiangsu, 213144, China

0519-8123 1598 / 0519-8123 1568

0519-8123 6586

info@pilot-scale.com



PILOT'S PRODUCTS

产·品·指·南

www.Pilot-scale.com



常州佰利得称重设备有限公司
PILOT SCALE CO., LTD.

ABOUT US

关于我们 >>>

常州佰利得称重设备有限公司是一家专业致力于电子衡器研制、开发、生产和销售的高新技术企业，拥有一批精干的电子衡器专业技术人才，凭借领先的技术、创新严谨的设计，精良的生产设备、完备的检测和质量保证体系为用户提供品质卓越的佰利得衡器。

历经多次完善，公司已经完成了针对多类别产品的焊接工艺和表面处理工艺的提 升，例如:商业衡器配件，工业衡器配件，非标称重解决方案的配件，电动工具配件，五金冲压及焊接制品。为了实现替客户创造价值的理念佰利得还为客户提供精准的装配以及测试服务司有严格的质量管理系统，拥有全套先进设备，其精湛的切割技术享誉全世界，本公司经营方式灵活多元化，生产种类繁多，质量稳定，种类齐全，品质卓越，产品享誉国内市场，并远销欧美、东南亚、中东、俄罗斯等国家和公司拥有较完整的销售服务网络，建立完善了一整套服务监督机制，佰利得衡器贴心的服务定会温暖每一个客户

多年来本公司注重信誉、看重长远、保证质量、价格优惠、服务一流的思想为原则，得到了广大用户的认可，并成为长久的合作伙伴佰利得愿意再接再厉与各界朋友进行更好的合作，共创美好的明天。



“

PILOT SCALE specialized in designing manufacturing and selling accessories and parts for weighing scales, and we also provide industrial weighing total solutions. Main products includes: bench scale, platform scale, truck weighing, livestock scale, cylinder scale, washdown scale, weighing indicator junction box so on. The company has strict quality control system with a full set of advanced equipments, which guarantee PILOT SCALE high and consistent quality. The company has diversified and flexible modes of operation, we serve a variety of weighing scale with a complete specifications, PILOT SCALE enjoy a good reputation in both China market and abroad market, now we already exported to Europe, America, Southeast Asia, Middle East countries, Russia and other countries and regions. Over the years, the company always focused the credibility, long-term development, quality guarantee, competitive price, efficient service. we have won continue cooperation from our customers. PILOT SCALE would like to work and better cooperate with our friends in different industries. PRECISION, BEYOND IMAGINATION!

CATA LOGUE 目录页 >>>

1 动态单轨衡 03
DYNAMIC MONORAIL SCALE

2 台秤系列 04-14
BENCH SCALE

3 移动秤系列 15-17
MOBILE SCALE SERIES


4 平台秤系列 18-26
PLATFORM SCALE SERIES

5 畜牧秤系列 27-28
LIVESTOCK SCALE SERIES

6 仪表配件 29-41
INSTRUMENT ACCESSORIES

7 模块 42-54
MODULE

8 汽车衡 55-56
TRUCK SCALE

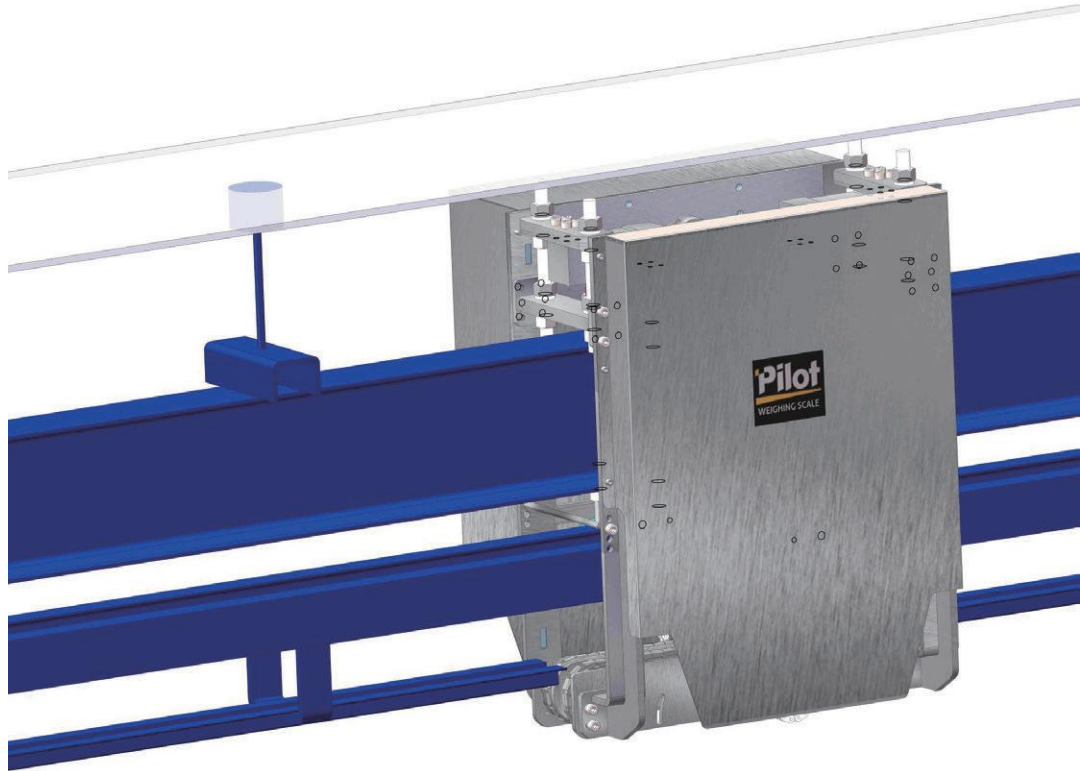

本产品为电子单轨吊秤(动态)

- A 产品包含动态秤体一套
- B IP68接线盒一只
- C 不锈钢传感器两只
- D 不锈钢防尘式称重仪表一套
- E 双屏蔽加粗信号线一根
- F 驱动电机一台
- G 变频器一套
- H 动态称重软件一套

MODEL 型号	ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
铸铝材质/Aluminum BA4252	1/3000-1/6000	60kg-300kg	50g	420*520mm

BA Aluminum Bench Scale

BA 系列铝台秤

- BA models scale body is aluminum block die cast molding , without welding, strong and beautiful. The lower cost will make the model much more competitive.
- **Capacity:** 60-300kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Feature:** stable and economic, BA series is very competitive in price.
- **Sites Application:** outdoors/factory plant/ moisture circumstance (cell shelter is needed)
- **Industry Application:** Chemical industry/ logistics/ware house/ aquaculture
- 秤体铝块压铸成型, 无焊接, 坚固美观。
- **量 程:** 60-300kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要特点:** 经济耐用, 坚固美观, 价格经济实惠
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- **行业应用:** 物流/仓储/养殖/贸易/零售




MODEL型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
BRQ3040-60	BR3040-60				
BRQ4050-150	BR4050-150				
BRQ4050-300	BR4050-300				
BRQ5060-150	BR5060-150				
BRQ5060-300	BR5060-300				
BRQ6080-300	BR6080-300				
BRQ6080-600	BR6080-600				
BRQ8010-1000	BR8010-1000				
		1/3000-1/6000	60kg	10g	300*400mm
			150kg	20g	400*500mm
			300kg	50g	400*500mm
			150kg	20g	500*600mm
			300kg	50g	500*600mm
			300kg	50g	600*800mm
			600kg	100g	600*800mm
			1000kg	200g	800*1000mm

BR/BRQ Bench Scale

BR/BRQ系列台秤

- BR series is the one of our most beautiful bench scale models. Special finishing and sand blasting techniques get BR model a perfect shinning finish and matte finish. Square column and load cell shelter are also optional for this model.
- 佰利得最漂亮的台秤产品之一，完美的焊缝，特殊的喷砂和拉丝工艺，实现了完美的亚光及亮光表面处理。深受高端用户青睐，同样可选配方立杆，防水保护罩。
- 容量：1000kg (可根据客户需求定制特殊量程)
- 主要配置：推荐中航传感器/可根据需要选配其他品牌传感器
- 主要特点：结构简洁新颖/结构强度大
- 适用场所：置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- 行业应用：化工/物流/仓储/养殖/贸易零售
- Capacity: 1000kg (special capacities upon request)
- Configuration: ZEMIC load cell (Special load cells upon request)
- Main Feature: High class design/Easy to clean/Good strength
- Sites Application: Outdoors/Factory plant/Moisture circumstance
- Industry Application: Chemical industry/Logistics/Ware house/ Aquaculture




MODEL型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
BBQ3040-60	BB3040-60				
BBQ4050-150	BB4050-150				
BBQ4050-300	BB4050-300				
BBQ5060-150	BB5060-150				
BBQ5060-300	BB5060-300				
BBQ6080-300	BB6080-300				
BBQ6080-600	BB6080-600				
BBQ8010-1000	BB8010-1000				
		1/3000-1/6000	60kg	10g	300*400mm
			150kg	20g	400*500mm
			300kg	50g	400*500mm
			150kg	20g	500*600mm
			300kg	50g	500*600mm
			300kg	50g	600*800mm
			600kg	100g	600*800mm
			1000kg	200g	800*1000mm

BB/BBQ系列台秤

BB/BBQ Bench Scale

- BB/BBQ series is a common but reliable one. The sus430 pan and load cell without OIML approval are optional if you choose the two options above. The lower cost will make the model much more competitive.
- 全方管组合焊接结构，结构朴实，但结构长期结实耐用，稳定可靠，可选配430不锈钢秤盘，非认证传感器，组成BQ4050经济型台秤，适合大量推广。
- 容量：1000kg (可根据客户需求定制特殊量程)
- 主要配置：推荐中航传感器/可根据需要选配其他品牌传感器
- 主要特点：结构强度大/长期稳定可靠
- 适用场所：置于地面/户外使用/工厂车间使用/可频繁移动
- 行业应用：物流/仓储/养殖/贸易零售
- Capacity: 1000kg (special capacities upon request)
- Configuration: ZEMIC load cell (Special load cells upon request)
- Main Feature: BQ series is very competitive in price.
- Sites Application: outdoors/factory plant/ moisture circumstance (cell shelter is needed)
- Industry Application: Chemical industry/ logistics/ware house/ aquaculture



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
BXQ3040-60	BX3040-60				
BXQ4050-150	BX4050-150				
BXQ4050-300	BX4050-300				
BXQ5060-150	BX5060-150				
BXQ5060-300	BX5060-300				
BXQ6080-300	BX6080-300				
BXQ6080-600	BX6080-600				
		1/3000-1/6000	60kg	10g	300*400mm
			150kg	20g	400*500mm
			300kg	50g	400*500mm
			150kg	20g	500*600mm
			300kg	50g	500*600mm
			300kg	50g	600*800mm
			600kg	100g	600*800mm

BX/BXQ Bench Scale


BX/BXQ 系列台秤

- BX is a brand new designed bench scale. Looks like the letter “X”, that’s why we have the model name BX. The weighing performance is as good as other model. No tubes are used in BX model, easy to clean.

- **Capacity:** 600kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Feature:** New good looking design/Easy to clean/Good strength
- **Sites Application:** Outdoors/Factory plant/Moisture circumstance
- **Industry Application:** Chemical industry/Logistics/Ware house/Aquaculture

- 创新使用全钢板折弯焊接结构，造型简洁新颖，结构强度大，与其他台秤系列一起，为客户在秤体结构方面提供了丰富多元的选择。

- **量 程:** 600kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要特点:** X型结构简洁新颖/全钢板结构强度大
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- **行业应用:** 化工/物流/仓储/养殖



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
BSQ3040-60	BS3040-60				
BSQ4050-150	BS4050-150				
BSQ4050-300	BS4050-300				
BSQ5060-150	BS5060-150				
BSQ5060-300	BS5060-300				
BSQ6080-300	BS6080-300				
BSQ6080-600	BS6080-600				
		1/3000-1/6000	60kg	10g	300*400mm
			150kg	20g	400*500mm
			300kg	50g	400*500mm
			150kg	20g	500*600mm
			300kg	50g	500*600mm
			300kg	50g	600*800mm
			600kg	100g	600*800mm
			1000kg	200g	800*1000mm

BS/BSQ系列台秤


BS/BSQ Bench Scale

- Capacity of BS/BSQ series up to 1000kg. The square column is optional. And load cell shelter is optional for the water proof when you choose aluminum cell. Our indicator T35/T32 is all suitable for BS/BSQ model.

- **Capacity:** 1000kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Feature:** High class design/easy to clean/Good strength
- **Sites Application:** Outdoors/Factory plant/Moisture circumstance
- **Industry Application:** Chemical industry/Logistics/Ware house/Aquaculture

- 高强度方管与钢板组合焊接成型，外形简洁实用，上下秤体均使用可调节水平脚连接秤盘和地面，结合秤体整形，安装版铣平，最大限度规避了因秤体水平问题导致小称量误差问题，可选配方立杆，选配防水保护罩。

- **量 程:** 1000kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要特点:** 结构简洁新颖/结构强度大
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境 (选配保护罩)
- **行业应用:** 化工/物流/仓储/养殖/贸易零售

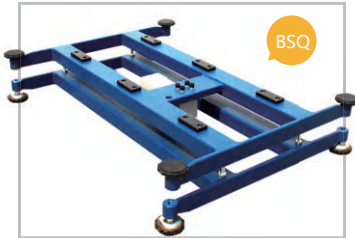


MODEL型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
-	BW2633-15	1/3000-1/6000	15kg	2g	260*335mm
-	BW2633-30		30kg	5g	260*335mm
-	BW4050-30		30kg	5g	400*500mm
-	BW4050-60		60kg	10g	400*500mm
-	BW4560-60		60kg	10g	450*600mm
-	BW4560-150		150kg	20g	450*600mm

BW Wash Down Bench Scale

BW 系列可冲洗台秤

- BW series have no holes and gaps on it, the scale could be washed down very comprehensive.Load cell is laser welded and the water proof class could reach IP67.
- **Capacity:** 150kg (special capacities upon request)
- **Configuration:** SCAIME load cell recommended (special load cell upon request)
- **Main Function:** Meat processing weighing/Check weighing/Count
- **Main Feature:** Water proof/Wash down
- **Sites Application:** On the table/Outdoors/Factorplant/Moisture circumstance/Portable
- **Industry Application:** Meat processing industry/ Food processing/ Paint industry/Retail industry/Aquaculture
- 不锈钢全密封焊接秤体, 秤体及秤盘无任何孔洞缝隙, 配备全不锈钢激光焊接传感器, 防水等级达IP67, 可使用清水或者清洗液彻底冲洗, 防止污物残留。
- **量 程:** 150kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐使用法国世感传感器 / 可根据需要选配其他品牌传感器
- **主要功能:** 肉食分割称重/检重/计数
- **主要特点:** 防水/可冲洗
- **适用场所:** 置于桌面/户外使用/工厂车间使用/潮湿环境使用/可频繁移动
- **行业应用:** 肉食分割/食品加工/油漆化工/零售



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
BC3Q-2323-15	BC3-2323-15	1/3000-1/6000	15kg	2g	230*230mm
BC3Q-2828-15	BC3-2828-15		15kg	2g	280*280mm

BC3系列可冲洗台秤

BC3 Wash Down Bench Scale

- The bases are cut by laser and bended to the final shape without any welding work. The SST load cell is recommended. The scale itself is small and very suitable to use on the table.
- **Capacity:** 15kg (special capacities upon request)
- **Configuration:** SCAIME load cell recommended (special load cell upon request)
- **Main Function:** Check weighing/Count/Total/Normal weighing
- **Main Feature:** Portable/Wash down
- **Sites Application:** On the table/Factory plant/Moisture circumstance/Portable
- **Industry Application:** Meat processing/Food processing/ Paint processing/Chemicalindustry/Retail
- 不锈钢激光切割下料, 单片折弯秤体, 配备全不锈钢激光焊接传感器, 防水等级达IP67, 可使用清水或者清洗液彻底冲洗, 防止污物残留。秤体小巧, 适合在工作台上使用。
- **量 程:** 15kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐使用法国世感传感器 / 可根据需要选配其他品牌传感器
- **主要功能:** 普通称重/检重/计数
- **主要特点:** 防水/可冲洗
- **适用场所:** 置于桌面/工厂车间使用/潮湿环境使用/可频繁移动
- **行业应用:** 肉食分割/食品加工/油漆化工/零售



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
BJQ3040-60	-	1/3000-1/6000	60kg	10g	300*400mm
BJQ4050-150	-		150kg	20g	400*500mm
BJQ4050-300	-		300kg	50g	400*500mm
BJQ5060-150	-		150kg	20g	500*600mm
BJQ5060-300	-		300kg	50g	500*600mm

BJQ Bench Scale

BJQ 钣金秤

- BJQ models scale body is made of high strength plate bending, without welding, strong and beautiful. The lower cost will make the model much more competitive.
- **Capacity:** 300kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Feature:** stable and economic, BJQ series is very competitive in price.
- **Sites Application:** outdoors/factory plant/ moisture circumstance(cell shelter is needed)
- **Industry Application:** Chemical industry/ logistics/ware house/ aquaculture
- 秤体选用高强度板材折弯而成, 无焊接, 坚固美观。
- **量 程:** 300kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要特点:** 经济耐用, 坚固美观, 价格经济实惠
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- **行业应用:** 物流/仓储/养殖/贸易/零售




MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
-	BT2025-30	1/3000-1/6000	3-30kg	10g	200*250mm
-	BT2525-30		3-30kg	10g	250*250mm

BT 桌秤

BT Table Scale

- New design, small size, multi-function, SUS 304 stainless steel, laser welded scale body, it could be wash down very comprehensive, fit with LCD display, USB/rs232 serial port is optional, convenient and durable.
- **Capacity:** 3-30kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Function:** Meat processing weighing/Check weighing/Count
- **Main Feature:** Water proof/Wash down
- **Sites Application:** On the table/Outdoors/Factor plant/Moisture circumstance/Portable
- **Industry Application:** Meat processing industry/ Food processing/ Paint industry/Retail industry/Aquaculture
- 新造型, 小尺寸, 多功能, 整秤材质为304不锈钢密封焊接秤体, 可使用清水或者清洗液擦拭清洗, 防止污物残留, 含LCD显示屏, USB/rs232串口可选, 造型新颖, 便捷耐用。
- **量 程:** 3-30kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要功能:** 普通称重/检重/计数
- **主要特点:** 防水/可冲洗/简单易携
- **适用场所:** 置于桌面/工厂车间使用/潮湿环境使用/可频繁移动
- **行业应用:** 肉食分割/食品加工/油漆化工/零售

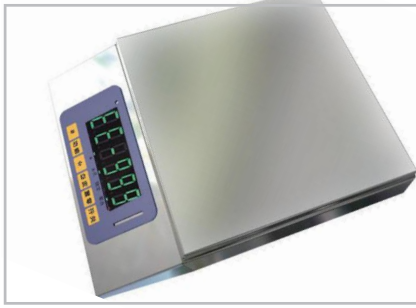


MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
BLQ3040-60	-	1/3000-1/6000	60kg	10g	300*400mm
BLQ4050-150	-		150kg	20g	400*500mm
BLQ4050-300	-		300kg	50g	400*500mm
BLQ5060-150	-		150kg	20g	500*600mm
BLQ5060-300	-		300kg	50g	500*600mm

BLQ Bench Scale

BLQ 物流秤

- BLQ Scale adopts CNC technology bent tubes design, choose high strength plate combined with round tube, have less welding points, strong and beautiful. It fit with PILOT T33 LCD new design indicator, easy to carry, better to save a space.
- Capacity:** 60-300kg (special capacities upon request)
- Configuration:** ZEMIC load cell (Special load cells upon request)
- Main Feature:** stable and economic, competitive in price.
- Sites Application:** outdoors/factory plant/ moisture circumstance (cell shelter is needed)
- Industry Application:** Chemical industry/ logistics/ware house/ aquaculture
- 物流秤采用数控弯管设计, 选用高强度板材与弯管相结合, 焊接点少, 坚固美观, 配我们的新款T33LCD显示屏仪表, 整秤出售, 简单易携, 节省空间, 经济耐用。
- 量 程:** 60-300kg (可根据客户需求定制特殊量程)
- 主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- 主要特点:** 简单易携, 坚固美观, 价格经济实惠
- 适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- 行业应用:** 物流/仓储/养殖/贸易/零售

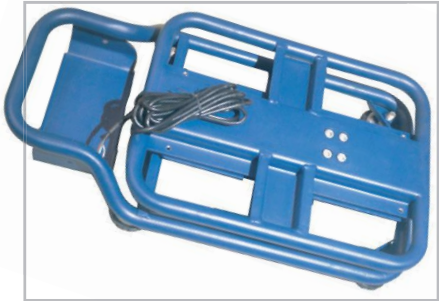

MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
BNQ3040-60	-	1/6000	60kg	10g	300*400mm
BNQ4050-150	-		150kg	20g	400*500mm
BNQ4050-300	-		300kg	50g	400*500mm
BNQ5060-150	-		150kg	20g	500*600mm
BNQ5060-300	-		300kg	50g	500*600mm
BNQ6080-300	-		300kg	50g	600*800mm
BNQ6080-600	-		600kg	100g	600*800mm

BNQ 弯管秤

BNQ Bench Scale

- BNQ models adopts CNC technology bent tubes design, choose high strength plate combined with round tube, have less welding points , strong and beautiful. The lower cost will make the model much more competitive.
- Capacity:** 600kg (special capacities upon request)
- Configuration:** ZEMIC load cell (Special load cells upon request)
- Main Feature:** stable and economic, BNQ series is very competitive in price.
- Sites Application:** outdoors/factory plant/ moisture circumstance (cell shelter is needed)
- Industry Application:** Chemical industry/ logistics/ware house/ aquaculture
- 秤体采用数控弯管设计, 选用高强度板材与弯管相结合, 焊接点少, 坚固美观。
- 量 程:** 600kg (可根据客户需求定制特殊量程)
- 主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- 主要特点:** 经济耐用, 坚固美观, 价格经济实惠
- 适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- 行业应用:** 物流/仓储/养殖/贸易/零售



MODEL 型号	DIMENSION 台面
MS碳钢	
BTQ4050	400*500mm
BTQ5060	500*600mm
BTQ6080	600*800mm



BTQ Trolley Scale

BTQ 推车秤

- BTQ Trolley Scale adopts CNC technology bent tubes design, choose high strength plate combined with round tube, have less welding points, strong and beautiful. The lower cost will make the model much more competitive. It has 4 wheels; handle can be folded, which is easy to carry, better to save a space.
- **Capacity:** 60-500kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Feature:** stable and economic, competitive in price.
- **Sites Application:** outdoors/factory plant/ moisture circumstance (cell shelter is needed)
- **Industry Application:** Chemical industry/ logistics/ware house/ aquaculture
- 推车秤整体采用数控弯管设计, 选用高强度板材与弯管相结合, 焊接点少, 坚固美观, 推车把手可折叠, 底部有四个轮子, 便于携带, 节省空间, 经济耐用。
- **量 程:** 60-500kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要特点:** 经济耐用, 坚固美观, 价格经济实惠
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动/潮湿环境
- **行业应用:** 物流/仓储/养殖/贸易/零售



MODEL 型号	CAPACITY 称量	Texture of material 材质	DIMENSION 台面
BZQ4560	60-500kg	MS碳钢	450*600mm

BZQ 折叠秤

BZQ Trolley Scale

- BZQ Trolley Scale adopts CNC technology bent tubes design, choose high strength plate combined with round tube, have less welding points, strong and beautiful. The lower cost will make the model much more competitive. It has 2 wheels; handle can be folded, which is easy to carry, better to save a space.
- **Capacity:** 60-500kg (special capacities upon request)
- **Configuration:** ZEMIC load cell (Special load cells upon request)
- **Main Feature:** stable and economic, competitive in price.
- **Sites Application:** outdoors/factory plant/moisture circumstance (cell shelter is needed)
- **Industry Application:** Chemical industry/logistics/ware house/ aquaculture



- 折叠秤整体采用数控弯管设计, 选用高强度板材与弯管相结合, 焊接点少, 坚固美观, 推车把手可折叠, 底部有两个轮子, 便于携带, 节省空间, 经济耐用。
- **量 程:** 60-500kg (可根据客户需求定制特殊量程)
- **主要配置:** 推荐中航传感器/可根据需要选配其他品牌传感器
- **主要特点:** 经济耐用, 坚固美观, 价格经济实惠
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动
- **行业应用:** 物流/仓储/养殖/贸易/零售



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
PPQ-540C-1.5	PP-540C-1.5	1/3000	1500kg	500g	1150*540mm
PPQ-690C-3	PP-690C-3		3000kg	1kg	1150*690mm
PPQ-540U-2	PP-540U-2		2000kg	1kg	1150*540mm
PPQ-690U-2	PP-690U-2	1/2000	2000kg	1kg	1150*690mm

MODEL 型号		CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢			
PCQ1520-5	-	5,000kg	2kg	1500*2000mm
PCQ1520-10	-	10,000kg	5kg	1500*2000mm
PCQ2030-10	-	10,000kg	5kg	2000*3000mm
PCQ2030-20	-	20,000kg	10kg	2000*3000mm
PCQ3040-20	-	20,000kg	10kg	3000*4000mm
PCQ3040-30	-	30,000kg	10kg	3000*4000mm

PP Series Forklift Scale

PP 系列叉车秤

- We use Channel steel to make the main body of PP series. So the max capacity of PP could reach 3t. Battery drawer if optional could work for long working hours. The finish is done by shot blasted and powder coated. PP series also supply you a economic selection, the main body of the fork is make of U beam. But the capacity of this selection is 2t.
 - **Capacity:** 3t (special capacities upon request)
 - **Configuration:** ZEMIC load cell (load cell model upon request)
 - **Main Function:** Pallet weighing/Cargo weighing
 - **Main Feature:** Easy upload/Long working time/ Portable
 - **Sites Application:** Outdoors/Factory plant
 - **Industry Application:** Steel/Logistics/Warehouse/Cargo service
- 主体叉车部分采用高强度槽钢制作, 量程达3t, 选配插槽式电池组, 待机时间超长; 结构表面采用抛丸静电喷涂, 塑层经久耐用; 液压系统均采用国内顶尖供应商产品, 机械结构及液压系统长期稳定可靠。
 - **量 程:** 3t (可根据客户需求定制特殊量程)
 - **主要配置:** 中航电测合金钢传感器 (传感器可根据客户需求定制)
 - **主要功能:** 托盘称重/物流包裹称重 主要特点: 托盘称重便捷/ 体积小巧/便携移动
 - **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动
 - **行业应用:** 钢铁行业/物流/仓储



PC 系列缓冲平台秤

PC Buffer Platform Scale

- Most parts of PC series are done by laser. PILOT proceed special welding techniques to make sure scale body could meet the tough requirements of long time , frequent and impact upload.
 - **Capacity:** 30t (special capacities upon request)
 - **Configuration:** ZEMIC load cell (load cell model upon request)
 - **Main Function:** Metal roll weighing/Heavy parts weighing
 - **Main Feature:** Strong impact resistance capability
 - **Sites Application:** Outdoors/Factory plant
 - **Industry Application:** Metallurgy industry/Metal industry/ Logistics/Warehouse
- 使用大厚度钢板激光切割焊接制成, 特殊满焊工艺提高结构强度, 配置高品质弹簧和传感器, 确保称重性能长期稳定可靠。
 - **量 程:** 30t (可根据客户需求定制特殊量程)
 - **主要配置:** 中航电测合金钢传感器 (传感器可根据客户需求定制)
 - **主要功能:** 钢卷称重/大重量工件高频率称重
 - **主要特点:** 抗冲击能力强
 - **适用场所:** 户外使用/工厂车间使用
 - **行业应用:** 冶金行业/钢铁行业/物流/仓储



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
PUQ9412-1.5	PU9412-1.5	1/3000-1/6000	1500kg	200g	1200*940*700 (width inside)
PUQ9412-3	PU9412-3		3000kg	500g	1200*940*700 (width inside)

MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
PTQ1000-1.5	PT1000-1.5	1/3000-1/6000	1500kg	200g	1000*100*2pcs
PTQ1000-3	PT1000-3		3000kg	500g	1000*100*2pcs
PTQ1200-1.5	PT1200-1.5		1500kg	200g	1200*100*2pcs
PTQ1200-3	PT1200-3		3000kg	500g	1200*100*2pcs

PU Platform Scale


PU 系列U型平台秤

- Main body of PU series are made of square tube. Two wheels installed on the fork head and make the scale portable. The inside width between two fork is 700mm, it wide enough for the pallet truck from Europe and America.
- **Capacity:** 3t (special capacities upon request)
- **Configuration:** ZEMIC load cell (load cell model upon request)
- **Main Function:** Pallet weighing/Logistic shipment weighing
- **Main Feature:** Easy for pallet truck upload/ Portable
- **Sites Application:** Ground/Outdoors/Factory plant
- **Industry Application:** Logistic industry/ Warehouse/Metal industry
- 高品质钢管锯床下料焊接成型, 结构简洁实用, 插齿端安装高品质尼龙轮子, 便于移动, 插齿内宽适用于美标和欧标叉车宽度。
- **量 程:** 3t (可根据客户需求定制特殊量程)
- **主要配置:** 中航电测合金钢传感器 (传感器可根据客户需求定制)
- **主要功能:** 托盘称重/物流包裹称重
- **主要特点:** 托盘加载便捷/体积小巧/便携移动
- **适用场所:** 置于地面/户外使用/工厂车间使用
- **行业应用:** 钢铁行业/物流/仓储

PT 条形平台秤

PT Platform Scale

- Main body of PT series is made of square tube. The width between two beams could adjust as you wish. (Please let us know your special requirements ahead of time for choosing the load cell with special length cable for you). The special foot unit we adopt help to improve the stability and accuracy of the scale.
- **Capacity:** 3t (special capacities upon request)
- **Configuration:** ZEMIC load cell (load cell model upon request)
- **Main Function:** Pallet weighing/Bulky cargo weighing
- **Main Feature:** Separated weighing beam/Portable
- **Sites Application:** Ground/Outdoors/Factory plant
- **Industry Application:** Warehouse/Logistic industry
- 两条称重杆可以根据称量物件的大小, 随意调整跨度 (如有特殊跨度需求, 需下订单时注明, 以便根据需要调整传感器线长), 特殊秤脚配置, 兼顾适应地面平整度, 秤体稳定以及称重的准确度, 适合体积及尺寸较大物件称重。
- **量 程:** 3t (可根据客户需求定制特殊量程)
- **主要配置:** 中航电测传感器 (可根据客户需求选择传感器)
- **主要功能:** 托盘称重/泡货称重
- **主要特点:** 秤体可分离/便携/秤体稳固不易侧倾
- **适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动
- **行业应用:** 仓储/物流

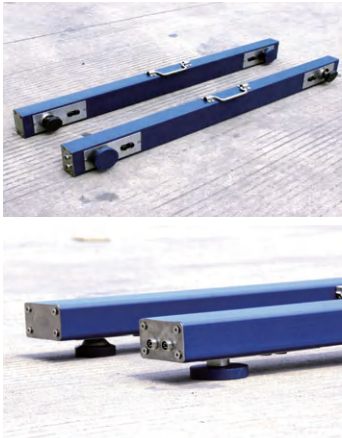

MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
PH30K-1010-1.5	-	1/30,000 最大为>up to 1/60,000	1500kg	50g	1000*1000mm
PH30K-1010-3	-		3000kg	100g	1000*1000mm
PH30K-1212-1.5	-		1500kg	50g	1200*1200mm
PH30K-1212-3	-		3000kg	100g	1200*1200mm

PH30K Ultra Precision Platform

PH30K 系列高精度平台秤

- We have this model a special design for the high precision weighing solution. To make sure the accuracy performance, PH30K adopt SCAIME cells. PILOT’ s T35 weighing indicator could fulfill the requirements of the model, but SCAIME indicator is highly recommended.
- **Capacity:** 3t (special capacities upon request)
- **Configuration:** SCAIME load cell recommended (special load cell upon request)
- **Accuracy:** 1/30,000
- **Main Function:** Ultra precision weighing/Check weighing/Count
- **Main Feature:** Ultra precision
- **Sites Application:** Ground/Outdoors/Factory plant
- **Industry Application:** Precious metal industry/Precious chemical material industry/Warehouse/Logistics
- 根据高精度称重需要, 全新设计秤体结构, 选配法国世感全进口传感器, 电气部分配备佰利得不锈钢接线盒以及T35全不锈钢仪表, 拓展功能丰富。SCAIME 原装进口仪表以及佰利得T32仪表同样适用该型号。
- **量 程:** 3吨 (可根据客户需求定制特殊量程)
- **主要配置:** 推荐使用法国世感传感器 / 可根据需要选配其他品牌传感器
- **精 度:** 1/30,000
- **主要功能:** 高精度称重/检重/计数
- **主要特点:** 高精度
- **适用场所:** 置于地面/户外使用/工厂车间使用
- **行业应用:** 贵金属及其产品称重/高价值化工原料称重/仓储/物流





MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
PLQ0808-1.5	PL0808-1.5	1/3000-1/6000	1500kg	200g	800*800mm
PLQ1010-1.5	PL1010-1.5		1500kg	200g	1000*1000mm
PLQ1010-3	PL1010-3		3000kg	500g	1000*1000mm
PLQ1212-1.5	PL1212-1.5		1500kg	200g	1200*1200mm
PLQ1212-3	PL1212-3		3000kg	500g	1200*1200mm
PLQ1515-3	PL1515-3		3000kg	500g	1500*1500mm

PL/PLQ 系列超低台面平台秤

PL/PLQ Pit Platform Scale

- If you don’ t want buy a fork lift or dig big hole in your factory, PL series is highly recommended.The minimum height of the deck plate is 55mm, so it is very easy for you to use your old pallet truck to get the product loaded onto the scale. We have to lose some strength of the scale due to the super low design. So the max capacity recommended is 3t.
- **Capacity:** 3t (special capacities upon request)
- **Configuration:** SCAIME load cell recommended (special load cell upon request)
- **Main Feature:** Scale with ramps/Easy to upload/Higher accuracy
- **Sites Application:** Outdoors/Factory plant
- **Industry Application:** Chemical industry/Logistics/Ware house/Aquaculture
- 超低台面带双引坡设计, 台面最低可达55mm, 花纹面板防滑引坡, 特别适合叉车或小推车加载卸载; 由于超低设计, 建议最大称量3t。
- **量 程:** 3吨 (可根据客户需求定制特殊量程)
- **主要配置:** 推荐使用法国世感传感器 / 可根据需要选配其他品牌传感器
- **主要功能:** 普通称重/物流称重
- **主要特点:** 加载卸载便捷/称量精度高
- **适用场所:** 置于地面/户外使用/工厂车间使用
- **行业应用:** 贸易/仓储/物流

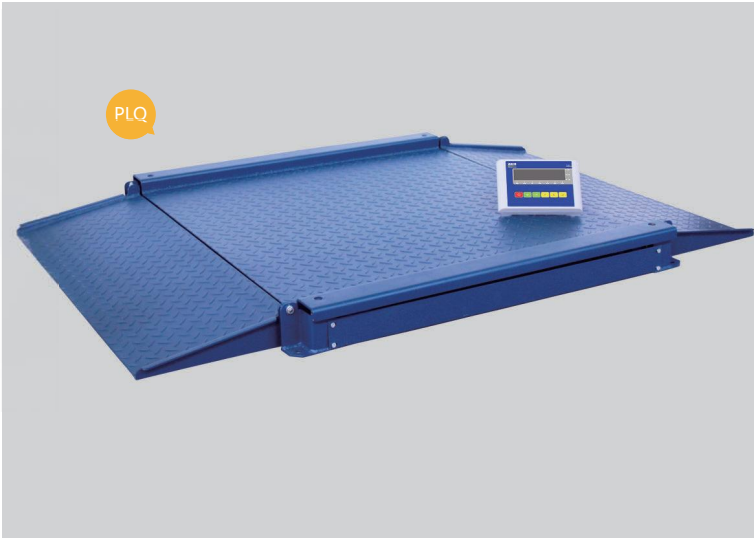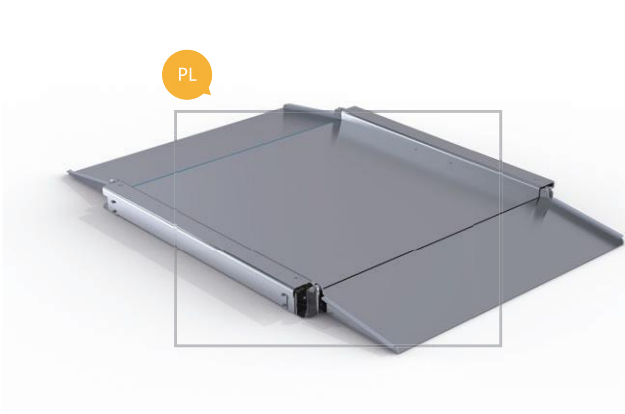


MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢	1/3000-1/6000	1500kg	200g	800*800mm
PSQ0808-1.5	PS0808-1.5		1500kg	200g	1000*1000mm
PSQ1010-1.5	PS1010-1.5		3000kg	500g	1000*1000mm
PSQ1010-3	PS1010-3		1500kg	200g	1200*1200mm
PSQ1212-1.5	PS1212-1.5		3000kg	500g	1200*1200mm
PSQ1212-3	PS1212-3		3000kg	500g	1500*1500mm
PSQ1515-3	PS1515-3		6000kg	1kg	1500*1500mm
PSQ1515-6	PS1515-6		6000kg	1kg	2000*2000mm
PSQ2020-6	PS2020-6		10000kg	2kg	2000*2000mm
PSQ2020-10	PS2020-10				

PS/PSQ Pit-less Platform Scale

PS/PSQ 系列单层平台秤

- Pit-less type design make PS model easy to install and it has low requirements to the ground level. The ramps are optional. If you need more capability in anti corrosion of mild steel version, we have the stainless or aluminum cover as optional parts for you.
 - Capacity:** 10t (special capacities upon request)
 - Configuration:** SCAIME load cell recommended (special load cell upon request)
 - Main Function:** Normal weighing/Flexible in use
 - Main Feature:** pit-less
 - Sites Application:** Outdoors/Factory plant/Moisture circumstance (cell shelter is needed)
 - Industry Application:** Chemical industry/ Logistics/Ware house/ Aquaculture
- 单层无框设计, 安装便捷, 使用区域灵活, 对地面平整度要求低, 可选配斜坡。碳钢版本可选配不锈钢罩, 或者铝板保护面板。
 - 量程:** 10t (可根据客户需求定制特殊量程)
 - 主要配置:** 推荐使用法国世感传感器/ 也可配置其他品牌传感器
 - 主要功能:** 普通称重/检重/计数
 - 主要特点:** 安装便捷/对场地要求低
 - 适用场所:** 置于地面/户外使用/工厂车间使用/可频繁移动
 - 行业应用:** 贸易/仓储/物流

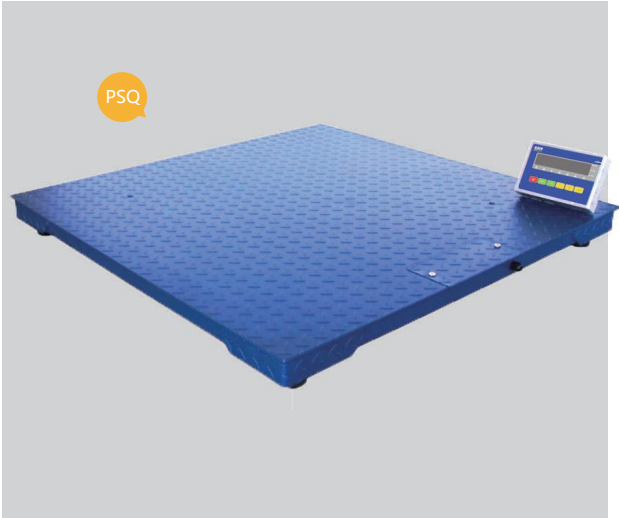


MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢	1/3000-1/6000	1500kg	200g	800*800mm
PDQ0808-1.5	PD0808-1.5		1500kg	200g	1000*1000mm
PDQ1010-1.5	PD1010-1.5		3000kg	500g	1000*1000mm
PDQ1010-3	PD1010-3		1500kg	200g	1200*1200mm
PDQ1212-1.5	PD1212-1.5		3000kg	500g	1200*1200mm
PDQ1212-3	PD1212-3		3000kg	500g	1500*1500mm
PDQ1515-3	PD1515-3		6000kg	1kg	1500*1500mm
PDQ1515-6	PD1515-6		6000kg	1kg	2000*2000mm
PDQ2020-6	PD2020-6		10000kg	2kg	2000*2000mm
PDQ2020-10	PD2020-10				

PD/PDQ 系列双层平台秤

PD/PDQ Pit Platform Scale

- Pit type platform scale PD Series has 8 side stoppers to protect the cell from damage caused by excessive movement when upload. The very normal person and very normal pallet truck could upload this model very easily, just because the scale is installed in the pit. The embedded frame is optional for you. PD series adopt the cell with blind hole and use the rock pin to replace the leveling feet. All the application cases prove that the cell with rocker pins have higher accuracy than those with leveling feet.
 - Capacity:** 10t (special capacities upon request)
 - Configuration:** SCAIME load cell recommended (special load cell upon request)
 - Main Function:** Pit installed/Easy to upload/Higher accuracy
 - Sites Application:** Outdoors/Factory plant
 - Industry Application:** Chemical industry/Logistics/Ware house
- 双层带框设计, 带传感器侧向限位, 基坑安装, 无需斜坡, 无需吊车, 普通叉车即可实现轻松加载卸载; 选用盲孔传感器, 秤体复位好, 称量精度优于通孔传感器。
 - 量程:** 10t (可根据客户需求定制特殊量程)
 - 主要配置:** 推荐使用法国世感传感器/ 也可根据需要选配其他品牌传感器
 - 主要功能:** 普通称重/检重/计数
 - 主要特点:** 基坑安装, 加载卸载便捷/称量精度高
 - 适用场所:** 置于地面/户外使用/工厂车间使用
 - 行业应用:** 贸易/仓储/物流

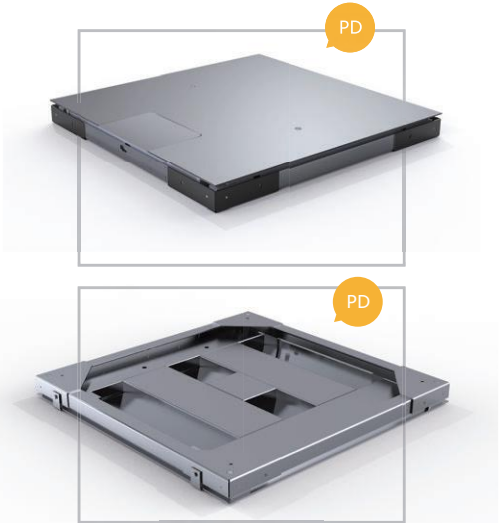

MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
-	PFS0808-1.5	1/3000-1/6000	1500kg	200g	800*800mm
-	PFS1010-1.5		1500kg	200g	1000*1000mm
-	PFS1010-3		3000kg	500g	1000*1000mm
-	PFS1212-1.5		1500kg	200g	1200*1200mm
-	PFS1212-3		3000kg	500g	1200*1200mm
-	PFS1515-3		3000kg	500g	1500*1500mm


PFS Hinged Plate Platform

PFS系列开盖平台秤

- The success of PFS platform is its sanitary design.All sealed welded pipes ensure that the contaminants do not enter the scale.The cables for weighing sensors are also hidden - inside the scale and tightened by threaded cable joints.All the movable supports adopt synthetic seal, which can avoid the corrosion of ash and even crevice.Intelligent design enables the detection function to facilitate the cleaning of any area.
- **Capacity:** 3t (special capacities upon request)
- **Configuration:**SCAIME load cell recommended (special load cell upon request)
- **Main Feature:** Pit installed/Easy to upload/Higher accuracy
- **Sites Application:** Outdoors/Factory plant/Moisture circumstance (cell shelter is needed)
- **Industry Application:** Chemical industry/ Logistics/Ware house/ Aquaculture



- PFS称重平台的成功性在于其卫生设计。全密封焊接管保证污染物不进入秤内。称重传感器的电缆也隐藏起来——置于秤的内部并由螺纹电缆接头收紧。所有活动支承均采用合成密封件，可避免藏灰甚至缝隙腐蚀。智能设计启用了检测功能，方便了秤任何区域的清洁。
- **量 程:** 3吨 (可根据客户需求定制特殊量程)
- **主要配置:** 推荐使用法国世感传感器 / 可根据需要选配其他品牌传感器
- **主要功能:** 普通称重/检重/计数
- **主要特点:** 安装便捷/对场地要求低
- **适用场所:** 置于地面/户外使用/工厂 车间使用/可频繁移动
- **行业应用:** 贸易/仓储/物流

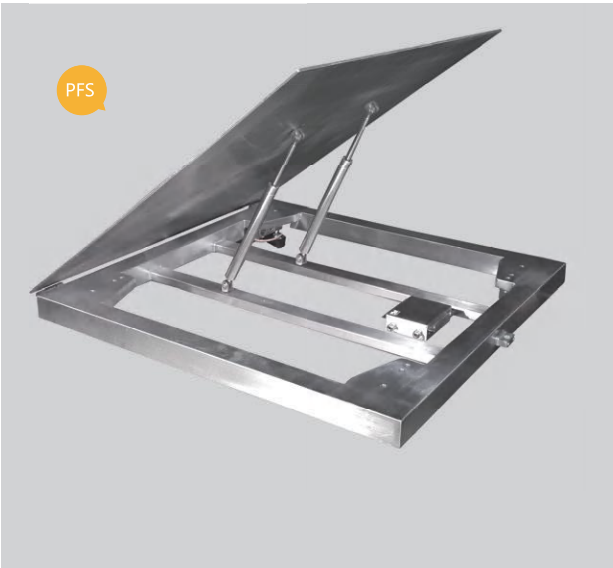


MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS 碳钢	SS 不锈钢				
PG0812-1.5	-	1/3000-1/6000	1500kg	200g	800*1200mm
PG0812-3	-		3000kg	500g	800*1200mm


PG系列液氯钢瓶秤

PG Cylinder Scale

- Most parts of PG series are done by laser. The whole body has shot blasted and powder coated after welding. The finishing could afford the tough corrosive environment.
- **Capacity:** 3t (special capacities upon request)
- **Configuration:** SCAIME load cell recommended (special load cell upon request)
- **Main Function:** Cylinder weighing
- **Main Feature:** Anti corrosion/High strength body
- **Sites Application:** Outdoors/Factory plant
- **Industry Application:** Chemical industry

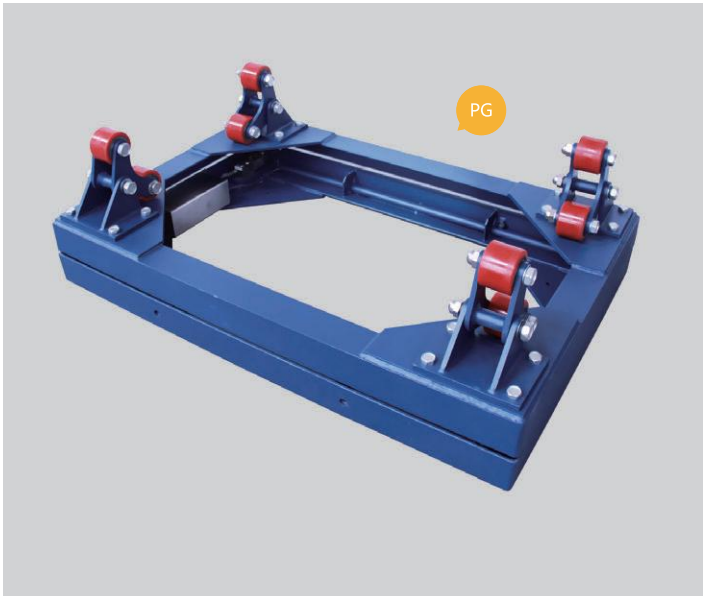

- 使用大厚度钢板激光切割焊接制成，抛丸后静电喷涂，塑层附着力大，长期抗腐蚀能力强，选用高强度尼龙滚轮，尺寸和量程可根据客户要求制作。
- **量 程:** 3吨 (可根据客户需求定制特殊量程)
- **主要配置:** 推荐使用法国世感传感器/ 也可配置其他品牌传感器
- **主要功能:** 液氯钢瓶称重/罐体称重
- **主要特点:** 防腐蚀能力强/秤体结构耐用
- **适用场所:** 户外使用/工厂车间使用 行业应用：化工行业



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
EWQ1800-500	-	1/3000-1/6000	500kg	500g	1800*500mm
EWQ2000-500	-		500kg	500g	2000*500mm

EWQ Livestock platform Scale

EWQ经济型通过式畜牧秤

- EWQ series is a innovation. All the electronic parts are installed on the top of the scale. Curved control for economic durability.You could wash down the scale every day. All the cables go though the inside of the scale. The piggish pig cannot have his cable chips any more. If you want to use the scale to weigh horse, we could also customize the width, the length and the height of the fence.
- 创新设计, 所有电气部分全部悬挂安装与秤体顶部, 弯管制作, 经济耐用。动物粪便及其他污物可充分冲洗, 电气部分不会受到影响; 全部电缆线从秤体内部通过, 防止称重过程中, 牲畜咬断缆线; 专利门锁设计, 开关门锁只需一步; 通过式设计, 可快速准确测量单只牲畜重量; 可根据称量对象不同, 定制秤体长宽, 以及护栏高度。
- 容量: 500kg (可根据客户需求定制特殊量程)
- 主要配置: 推荐使用中航传感器 / 也可根据需要选配配其他品牌传感器
- 主要功能: 牲畜称重
- 主要特点: 通过式秤体设计/称量速度快/精度高
- 适用场所: 置于地面/户外使用/工厂车间使用
- 行业应用: 养殖/农场/屠宰



MODEL 型号		ACCURACY 精度	CAPACITY 称量	DIVISION 感量	DIMENSION 台面
MS碳钢	SS不锈钢				
NWQ1800-1.5	NW1800-1.5	1/3000-1/6000	1500kg	500g	1800*500mm
NWQ2000-1.5	NW2000-1.5		1500kg	500g	2000*500mm

NW/NWQ通过式畜牧秤

NW/NWQ Livestock Platform Scale

- NW series is a innovation. All the electronic parts are installed on the top of the scale. You could wash down the scale every day. All the cables go though the inside of the scale. The piggish pig cannot have his cable chips any more. If you want to use the scale to weigh horse, we could also customize the width, the length and the height of the fence.
- 创新设计, 所有电气部分全部悬挂安装与秤体顶部, 动物粪便及其他污物可充分冲洗, 电气部分不会受到影响; 全部电缆线从秤体内部通过, 防止称重过程中, 牲畜咬断缆线; 专利门锁设计, 开关门锁只需一步; 通过式设计, 可快速准确测量单只牲畜重量; 可根据称量对象不同, 定制秤体长宽, 以及护栏高度。
- 容量: 1.5t (special capacities upon request)
- Configuration: SCAIME load cell recommended (special load cell upon request)
- Main Function: Livestock weighing/Animal weighing
- Main Feature: Electronics on the top/Clean by wash down
- Sites Application: Ground/Outdoors/Factory plant
- Industry Application: Farm/Packinhouse
- 容量: 1.5t (可根据客户需求定制特殊量程)
- 主要配置: 推荐使用法国世感传感器/ 也可配置其他品牌传感器
- 主要功能: 牲畜称重
- 主要特点: 通过式秤体设计/称量速度快/精度高
- 适用场所: 置于地面/户外使用/工厂车间使用
- 行业应用: 养殖/农场/屠宰





Weighing Indicator T31/T31-s/T32/T33/T35 称重显示器

- 5 models of weighing indicator are available for you. The indicators have variety of basic and extended functions. The very high quality PCB board and components we use get these indicators reliable performance in long term. T35 and T32 series adopt the built-in-board power supply module, the external adapter is no need for these two models. Lithium chargeable battery is available in T35 and T32. Both of them could use square or round column by using the different connector.
- 5个系列称重显示器可供选择, 仪表本身基础与拓展功能丰富, 采用高端主板配置, 整体性能长期稳定可靠; T35与T32系列采用主板内置电源模块, 无须外置适配器。且这两个型号选用大容量锂电池可充电电池组, 仪表工作时长。立杆连接方式也有方管和圆管两种连接方式供您选择。




	T35	T32	T31/T33/T31-S
Enclosure	SS	Plastic	Plastic/SS
Display	6-bit Red/Green LED Segment Display, 33.4mm	6-bit Red/Green LED Segment Display, 42mm	6-bit Red LED Segment Display, 42mm
Key	6	6	6
ADC			
Exciting Voltage	5V	5V	5V
	4X 350	4X 350	4X 350
Zero Input Range	≥0.1mV	≥0.1mV	≥0.1mV
SPAN Input Range	≤20mV	≤20mV	≤20mV
Resolution	6000e, 200000d	6000e, 200000d	6000e, 60000d
Display Range	2	2	1
Application	Weighing,Classify,Count, Animal Weighing,	Weighing,Classify,Count, Animal Weighing,	Weighing,Classify,Count
	Print & Total	Print & Total	
Serial Port	RS232/485, Isolated	RS232/485, Isolated	None
Power Supply	100~264VAC	100~264VAC	100~264VAC
Battery	Lithium Battery	Lithium Battery	Lithium Battery

	T35	T32	T31/T33/T31-S
外壳	不锈钢	塑料	塑料/不锈钢
显示	6位红色或绿色, 33.4mm	6位红色或绿色, 42mm	6位红色, 42mm
按键	6个薄膜按键	6个薄膜按键	6个机械按键
ADC			
激励电压	5V	5V	5V
支持传感器	4X 350	4X 350	4X 350
零点输入信号范围	≥0.1mV	≥0.1mV	≥0.1mV
SPAN输入信号范围	≤20mV	≤20mV	≤20mV
精度	6000e, 200000d	6000e, 200000d	6000e, 60000d
显示分度	2段显示分度	2段显示分度	1段显示分度
应用功能	称重, 分选、计数、动物称重、累计打印	称重, 分选、计数、动物称重、累计打印	称重, 分选、计数
串口	RS232/485, 隔离	RS232/485, 隔离	无
外部供电	交流100~264VAC	交流100~264VAC	交流100~264VAC
充电电池	锂电池可充电电池组	锂电池可充电电池组	锂电池可充电电池组




Junction Box 接线盒

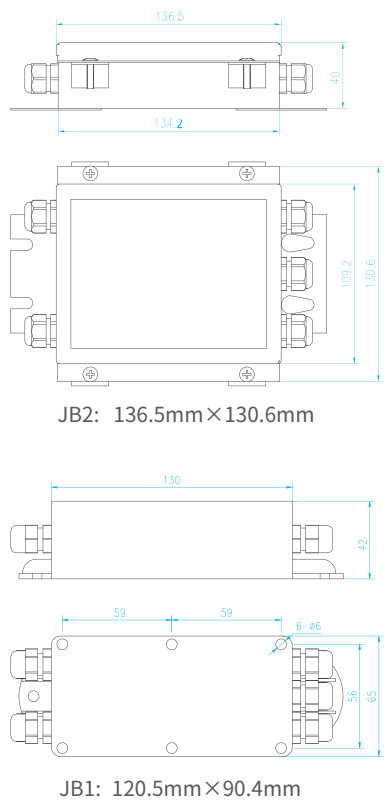


- Stainless Steel Enclosure: IP67/Cast Aluminun Waterproof Junction box
 - 5PPM Military grade electric resistance
 - Aviation grade potentiometer
 - Water proof, IP67
 - 60°inclined wiring terminal, easy to access
-
- 壳体采用奥氏体SUS304不锈钢材料/铸铝防水接线盒
 - 5ppm高精度低温漂军工级电阻
 - 采用航空级高精度电位器
 - 高防护等级防水接头, 防护等级IP67
 - 3M高标准不干胶标识 [JB1]
 - 上壳体采用镜面抛光处理, 下壳体采用高密度拉丝处理 [JB2]
 - 采用欧式 60°倾斜接线柱, 方便用户的接线与调试

Type of Pan	Optional Material	Finish	Optional Thickness
Vertical Angle	SUS304	Brushing	1.0/1.2/1.5/2.0mm
Bevel Angle	SUS304	Brushing	1.0/1.2/1.5/2.0mm
Edgefold Vertical	SUS304	Brushing	1.0/1.2/1.5/2.0mm
Edgefold Bevel	SUS304	Brushing	1.0/1.2/1.5/2.0mm
Round Angle	SUS304	Brushing	1.0/1.2/1.5/2.0mm



秤盘类型	秤盘材料	表面	可选厚度
直角	SUS304	拉丝	1.0/1.2/1.5/2.0mm
斜角	SUS304	拉丝	1.0/1.2/1.5/2.0mm
直角折边	SUS304	拉丝	1.0/1.2/1.5/2.0mm
斜角折边	SUS304	拉丝	1.0/1.2/1.5/2.0mm
圆角	SUS304	拉丝	1.0/1.2/1.5/2.0mm

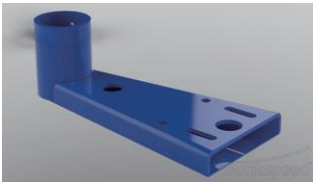

Mild Steel Couolumn Support
碳钢托架



Stainless Steel Couolumn Support
不锈钢托架



Column Assembly
立杆组合



Level Bubble Support
水泡支架




Level Feet
秤脚



Loadcell Shelter
传感器保护罩



Column
立杆

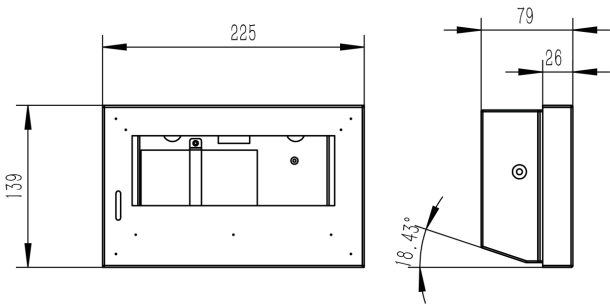



Weighing Indicator

T22 / T22-S 称重显示器

- T22 / T22-S, PILOT single channel high resolution universal scale, in ABS plastic or stainless steel case, with large 6-digit 7-segment LCD display, 6-button front panel keypad, easy-to-use user interface, versatile software and hardware options, compatible with any of PILOT's scales. Up to 8 transducers can be connected, providing excellent value for money!

- T22 / T22-S 仪表，佰利得一款单通道高分辨率通用称重仪表，采用 ABS 塑料外壳或不锈钢外壳，配备 6 位 7 段 LCD 大显示屏、6 按钮前面板按键，易于使用的用户界面、多功能软件和硬件选项，可搭配佰利得任何一款秤。最多可连接 8 只传感器，超高性价比！

	T22 / T22-S		T22 / T22-S	
外壳	ABS / 304不锈钢	Enclosure	ABS / 304 SS	
显示	6位高亮度LCD	Display	6-bit LCD	
按键	6个薄膜按键	Key	6 membrane keys	
激励电压	5V	Exciting Voltage	5V	
支持传感器	4X 350Ω	Sensor Support	4X 350Ω	
精度等级	Class III (OIML R76 eqv.)	Resolution	Class III (OIML R76 eqv.)	
显示分度	6段显示分度	Display Range	6 Segment Display	
应用功能	称重、分选、计数、动物称重、累计打印	Application	Weighing, sorting, counting, animal weighing, totalization printing	
串口	RS232 / RS485	Serial Port	RS232 / RS485	
外部供电	交流100~264VAC	Power Supply	100~264VAC	
充电电池	锂电池可充电电池组	Battery	Lithium Battery	



Y320 称重显示器

Weighing Indicator

- The Y320 Dustproof Weighing Instrument is a high quality, high performance industrial weighing device with excellent transmission performance, high accuracy and high flexibility, making it adaptable to a variety of complex industrial environments and meeting the needs of a wide range of different weighing applications, and can be used as a top of the line weighing instrument for use in non-explosive environments.

- Y320 防尘式称重仪表是一款高品质、高性能的工业称重设备，具有出色的传输性能、高精度和高灵活性，使它能够适应各种复杂的工业环境，满足各种不同的称重应用需求，可用于用于非爆炸性环境的顶级生产线称量仪表。

	Y320		Y320
外壳	304 不锈钢	Enclosure	304 SS
显示	OLED显示屏	Display	OLED
按键	4个轻触薄膜功能按键	Key	4 Segment Display
A/D转换率	200Hz	A/D conversion rate	200Hz
激励电压	5V	Exciting Voltage	5V
支持传感器	6X 350Ω	Sensor Support	6X 350Ω
最小输入灵敏度	0.6μV/d	Min. input sensitivity	0.6μV/d
重量显示	100000	Weight display	100000
防护等级	IP65	protection class	IP65
显示分度	6段显示分度	Display Range	6 Segment Display
串口	RS232/485 二选一 1个输入、4个输出	Serial Port	RS232/ RS485 Optional 1 Input, 4 Output
外部供电	交流100~240VAC	Power Supply	100~240VAC

可选功能
输入输出接口：4个输入、8个输出
模拟量接口：电流 0~20mA、4~20mA、0~24mA
电压：0~10V、0~5V、-5~+5V、-10~+10V



Optional Features
Input and output interface: 4 inputs, 8 outputs
Analog interface: current 0~20mA, 4~20mA, 0~24mA
Voltage: 0~10V, 0~5V, -5~+5V, -10~+10V






Weighing Indicator
T6X 本安防爆称重显示器

- Explosion-proof class: Ex ib IIC T4 Gb;
Explosion-proof certificate number: GYB22.2935X
T6X stainless steel safe explosion-proof indicator is suitable for: electronic bench scales, floor scales, truck scales, etc. using up to 4 static weighing systems with up to 4 350Ω load cells, which can be applied to most explosive gas occasions.
- 防爆等级: Ex ib IIC T4 Gb;
防爆合格证编号: GYB22.2935X
佰利得T6X全不锈钢本安型防爆仪表, 适用于: 电子台秤、平台秤、地上衡等使用最多4个350Ω传感器的静态称重系统, 可适用于多数爆炸性气体场合。

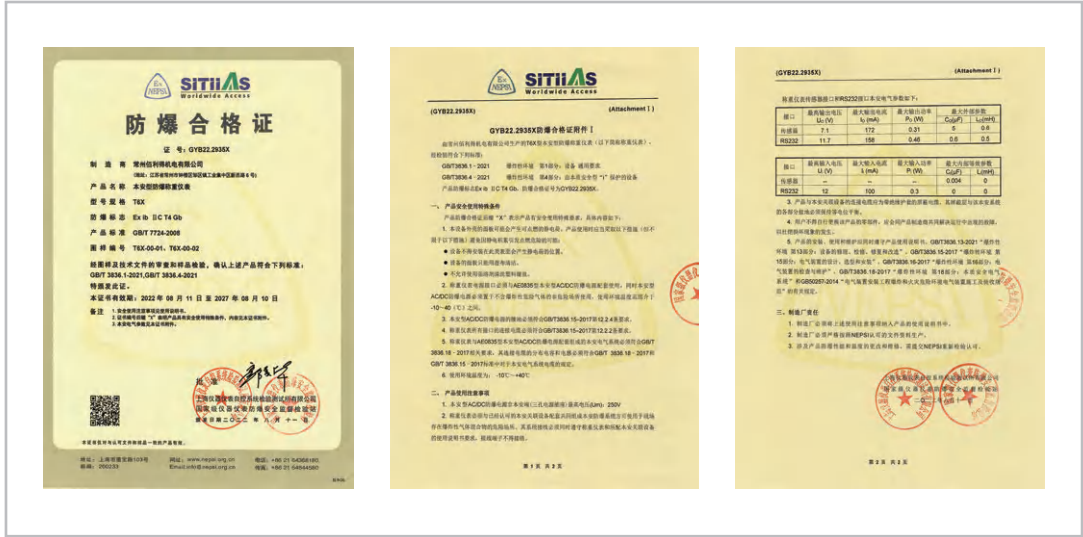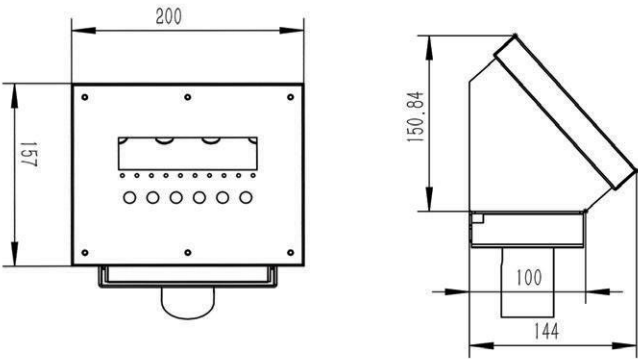

	T6X		T6X
外壳	304 不锈钢	Enclosure	304 SS
显示	6位绿色	Display	6-bit LED
按键	6个薄膜按键	Key	6 Segment Display
显示分度	100000	Display Range	100000
激励电压	5V	Exciting Voltage	5V
支持传感器	4X 350Ω	Sensor Support	4X 350Ω
AD采样速率	200Hz/100Hz	A/D conversion rate	200Hz/100Hz
工作温度	-10°C~40°C	Temperature	-10°C~40°C
输入范围	—10~30mV	Input Range	—10~30mV
显示分度	6段显示分度	Display Range	6 Segment Display
秤的功能	去皮、清皮、运动检测 零点自动跟踪	Functionality	Peeling, clearing, motion detection Zero point auto-tracking
串口	RS232、RS485、MODBUS-RTU	Serial Port	RS232、RS485、MODBUS-RTU
外部供电	9VDC电源输入, 整机大功耗3W	Power Supply	9VDC
充电电池	本安防爆可充电电池组	Battery	explosion-proof rechargeable battery

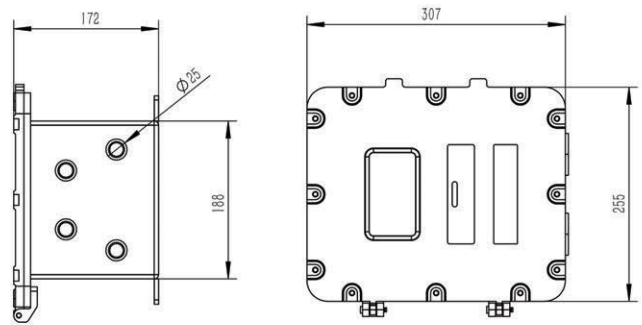

Weighing Indicator

BL66S 防爆称重显示控制箱

- BL66S weighing explosion-proof box The shell is made of aluminum alloy die-casting, beautiful appearance, can be equipped with PILOT a variety of styles of instrumentation, composed of suitable for petrochemical, brewery, paint, printing and dyeing and other hazardous environments of the explosion-proof type indicator.

- BL66S 称重防爆箱 外壳采用铝合金压铸成型, 外形美观, 可选配佰利得多种款式仪表, 组成适用于石油化工、酿酒、油漆、印染等危险环境的隔爆型称重显示器。

	BL66S		BL66S
外壳	铝合金	Enclosure	aluminum alloy
显示	OLED显示屏	Display	OLED
按键	4个轻触薄膜功能按键	Key	4 Segment Display
A/D转换率	200Hz	A/D conversion rate	200Hz
激励电压	5V	Exciting Voltage	5V
支持传感器	6X 350Ω	Sensor Support	6X 350Ω
最小输入灵敏度	0.6μV/d	Min. input sensitivity	0.6μV/d
重量显示	100000	Weight display	100000
防护等级	IP67	protection class	IP67
显示分度	6段显示分度	Display Range	6 Segment Display
串口	RS232/485 二选一 1个输入、4个输出	Serial Port	RS232/ RS485 Optional 1 Input, 4 Output
外部供电	交流100~240VAC	Power Supply	100~240VAC

可选功能
输入输出接口: 4个输入、8个输出
模拟量接口: 电流 0~20mA、4~20mA、0~24mA
电压: 0~10V、0~5V、-5~+5V、-10~+10V

Optional Features
nput and output interface: 4 inputs, 8 outputs
Analog interface: current 0~20mA, 4~20mA, 0~24mA
Voltage: 0~10V, 0~5V, -5~+5V, -10~+10V



T360 称重显示器

Weighing Indicator

- Modular design, supports 35mm rail mounting
- Second display with 4.3" color screen for panel mounting, IP65 panel.
- Weighing platform connection, supports up to 4 analog weighing platforms.
- Supports English and Chinese menus.
- 0.96" long life 128x64 green OLED display.
- Zeroing, tare, tare and other key weighing functions.
- Basic model supports isolated 2 in 4 out discrete IO with 1 channel isolated rs485 and isolated RS232.
- Option board support: ProfiNet, EtherNet/IP, Modbus-TCP, EtherCAT, ProfiBus-DP, Modbus-RTU , Ethernet, etc. ProfiBus-DP,Modbus-RTU , Ethernet
- Supports 4-20mA/0-10V output.

- 模块化设计, 支持35mm导轨式安装
- 带4.3寸彩屏第二显示器, 支持面板式安装, 面板符合IP65
- 称台连接,最多支持4个模拟秤台
- 支持中英文菜单
- 0.96寸长寿命128x64绿色OLED显示屏
- 具备清零,去皮,去皮等按键称重功能
- 基本型支持隔离2入4出离散IO与1路隔离rs485和隔离RS232
- 选件板支持: ProfiNet,EtherNet/IP,Modbus-TCP,EtherCAT, ProfiBus-DP,Modbus-RTU , Ethernet
- 支持4-20mA/0-10V输出

速度与精度

Speed and Precision

T360提供高速及高精度重量测量。

多通道应用

multichannel

T360支持最多4通道高精度AD, 同时可支持最多4个秤台应用。

紧凑性外壳

Compact housing

T360 DIN导轨式外壳,支持标准的35mm 导轨, 40mm壳体宽度, 节省控制箱空间

连接性

connectivity

T360支持市面上常见的现场总线与工业以太网接, 帮助客户快速完成系统集成。

高清晰
显示屏


High Definition
display screen

高清晰度绿色OLED显示屏,最多支持4行 汉字显示,并支持导航式按键。 支持外接第二显示屏,4.3屏彩色屏,带 设置按键,支持面板式安装, 符合IP65。

T360 称重显示器规格定义	
外壳	导轨式ABS塑料外壳，35mm导轨式安装，带绿色的锁定夹
尺寸（宽×高×长）	40mm×135.5mm×100mm
防护等级	防护等级为IP20
使用环境	温度：-10℃~40℃ (14°~104° F) 相对湿度：10%~95%，不冷凝
电源	直流：+24VDC（10-30VDC） 交流：100-240VAC 功率：10W
显示屏	0.96寸128x64全点阵、绿色OLED显示屏，支持中英文菜单
重量显示	最大显示分度数为100,000
秤台类型	1 或4个模拟式秤台
传感器数量	通道1支持1~10个350欧姆的传感器（灵敏度为2或3mV/V） 通道2-3支持1~8个350欧姆的传感器（灵敏度为2或3mV/V）
A/D 更新速率	A/D转换率：200Hz
传感器激励电压	5VDC
最小输入灵敏度	0.6μV/d
键盘	4个轻触薄膜功能按键（上、下、左、Enter） 带蜂鸣器按键提示
基本型	串行通信接口：一个RS232，一个RS485（全隔离） 离散输入输出接口：2个输入、4个输出（全隔离） MOSFET接口 第二显示屏接口：接4.0寸TFT彩屏接口
选件板1	模拟量接口板：电流 0~20mA、4~20mA、0~24mA 电压 0~10V、0~5V、-5~+5V、-10~+10V 秤台接口板：2-4通道秤台接口
选件板2	工业总线与以太网接口板：Profibus、PROFINET、 Ethernet/IP、EtherCAT、Mosbus-TCP、Ethernet
软件应用功能	上下限报警，累加秤，动物秤，计数秤，检重秤，料位保持 灌装，灌装/卸料，分装，补料/分装，配料，配料/卸料，配料/分装

T360 接口定义与安装连线图


T360具有丰富的接口，可以通过自动化接口很容易完成系统集成，可与最流行的PLC/DCS连接，并支持多秤台应用。

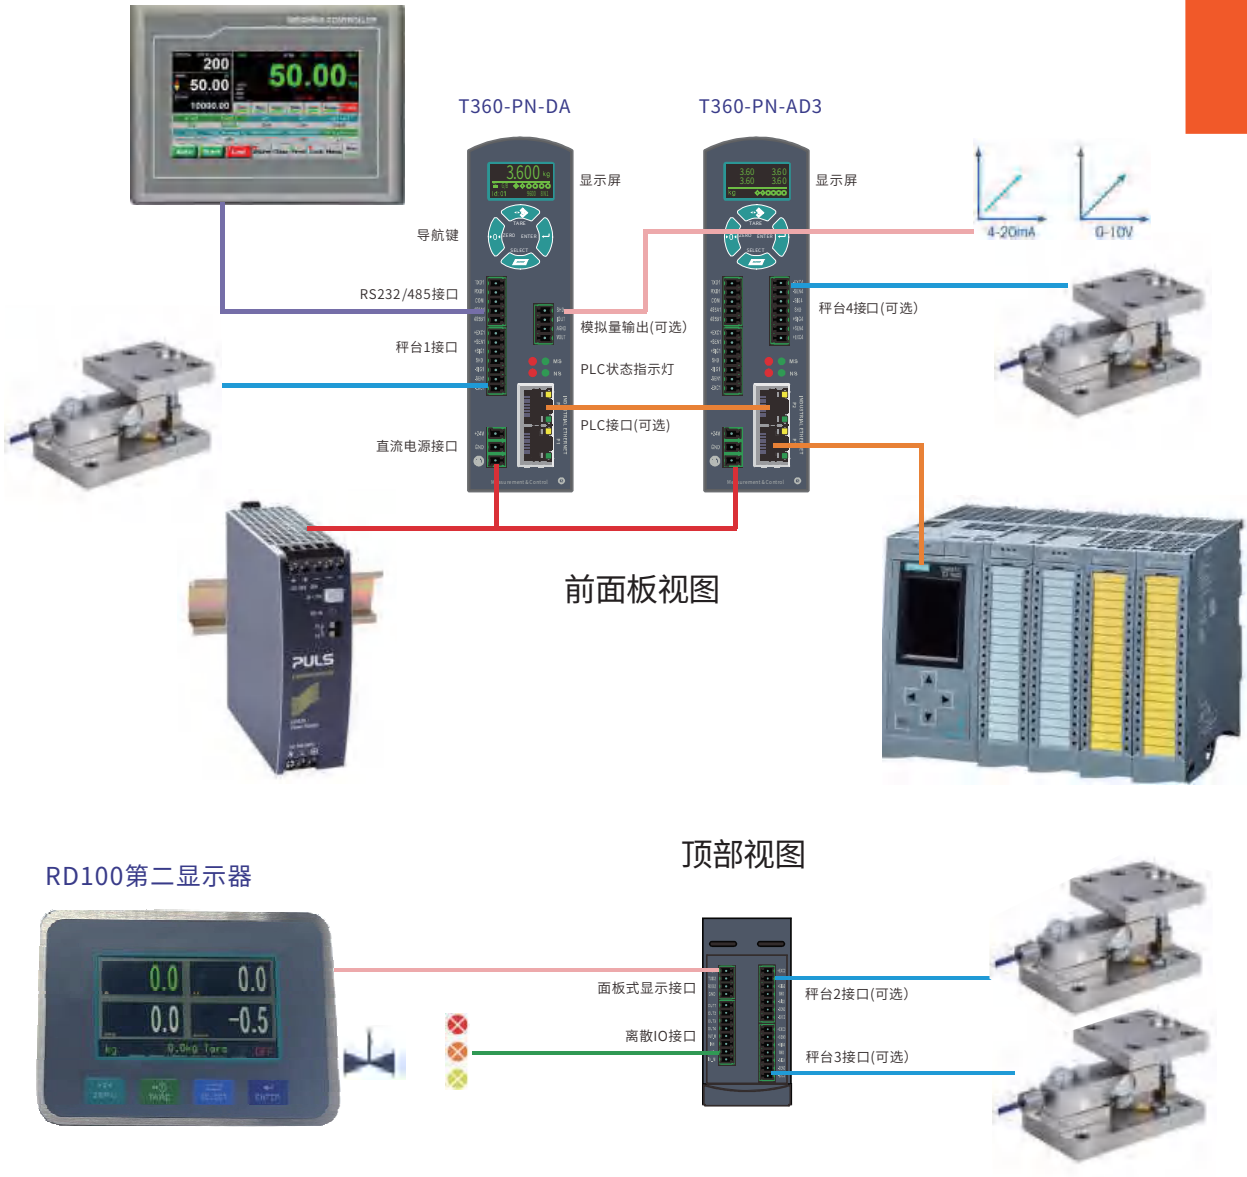

T360 订购信息

T360开机时会显示当前仪表配置，下面为T360配置信息定义：



型号	PLC选件板 1	AO/AD选件板 2	电源类别
T360X	XX	XX	XX
T360D: 导轨式	NC:无选件板	NC:无选件板	DC:24V 直流
T360H: 防尘式*	DP:Profibus-DP	AO:4-20mA/0-10V	AC:1002-40VAC 交流
*:开发中	PN:ProfiNet	AD2:2 通道秤台板	
	EIP:EtherNet/IP	AD3:3 通道秤台板	
	TCP:Modbus-TCP		
	CAT:EthernetCAT		
	NET:Ethernet		

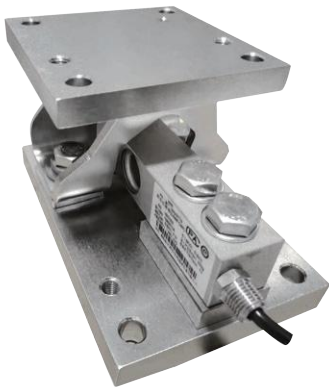


- WW 系列 静态动态两用模块
可选配佰利得定制法国 SCAIME 不锈钢传感器，满足 3 个量程段不同尺寸和精度需求，搭配佰利得仪表或 SCAIME 仪表型号 IPC20/IPE50，不锈钢防水接线盒，组装成静态动态两用模块。广泛应用于化工，水泥，粮食等行业，对于管理和控制实现了一体化，达到了提高生产效率的目的。
- WW Series Static-Dynamic Dual Purpose Module
Optional France SCAIME stainless steel sensor to meet the different size and accuracy requirements of 3 ranges, with PILOT meter or SCAIME meter model IPC20/IPE50, stainless steel waterproof junction box, assembled into a static and dynamic dual-purpose module. Widely used in chemical, cement, grain and other industries, for the management and control of the realization of the integration of the purpose of improving production efficiency.

WW系列 静态动态两用模块

WW Post Type Modules

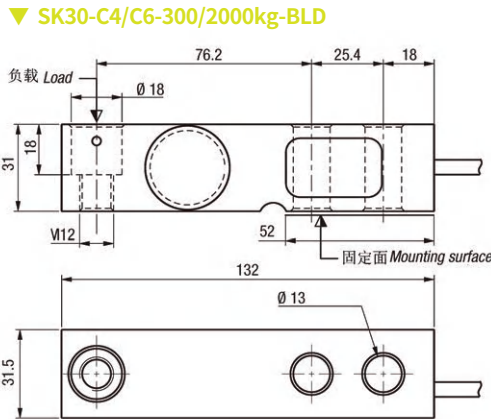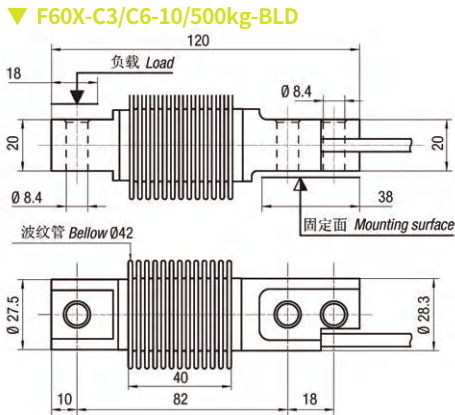

- 不锈钢结构
- 全密封焊接 IP68
- 输出信号电流匹配
- 有利于多只传感器系统
- 适用于地磅以及料罐使用
- Stainless steel construction
- Hermetically welded to IP68
- Current calibrated signal output
- For multi-load cells mounting
- Ideally suited for platform scales

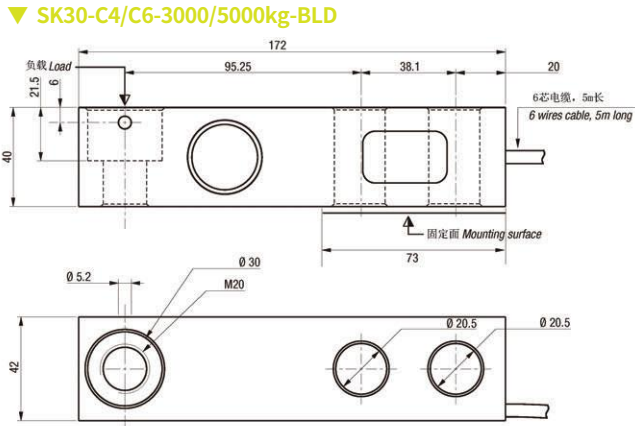



选配称重仪表 IPC20 (10000d / 2 x 3 000d)

- 可达10000d EN 45501认证分度
- 背光25mm LCD显示, 5个防水按键
- 结实紧凑的ABS 外壳, 适合放置于桌面、立柱或墙装式安装。
- 可接多达8只 350Ω (4线/6 线制)
- STD版本, 4节AA电池或适配器供电, IP54防护等级
- IND版本, 内置可充电电池, IP68防护等级

- Approved up to 10000d according to EN45501
- Backlight 25mm LCD display, 5-Key waterproof keyboard
- Very strong and compact ABS housing, suitable for table top, column or wall mounted use
- Up to 8 load cells 350Ω (4/6-wire)
- STD Version, Supplied with 4xAA batteries or adaptor, IP54 level
- IND Version, built-in rechargeable battery, IP68 level




选配称重仪表 IPE50 Panel (10000d / 2 x 3 000d)


- 符合EN45501的10000d分度
- 紧凑的外壳, 面板式安装
- 可连接8个350Ω称重传感器
- 1个RS485输出和1个RS232输出, 可选PROFIBUS DP
- 2继电器输出和2个逻辑输入, 可选4继电器输出
- 可选模拟量输出

- Approved up to 10 000d according to EN 45501
- Compact housing, panel mounting
- Up to 8 load cells 350Ω (4 or 6 wire)
- 1RS485 output and 1 RS232 output, PROFIBUS DP in option
- 2relay outputs and 2 logical inputs, 4 additional relay outputs in option
- Analog output in option

模块外形尺寸及模块布置示意图

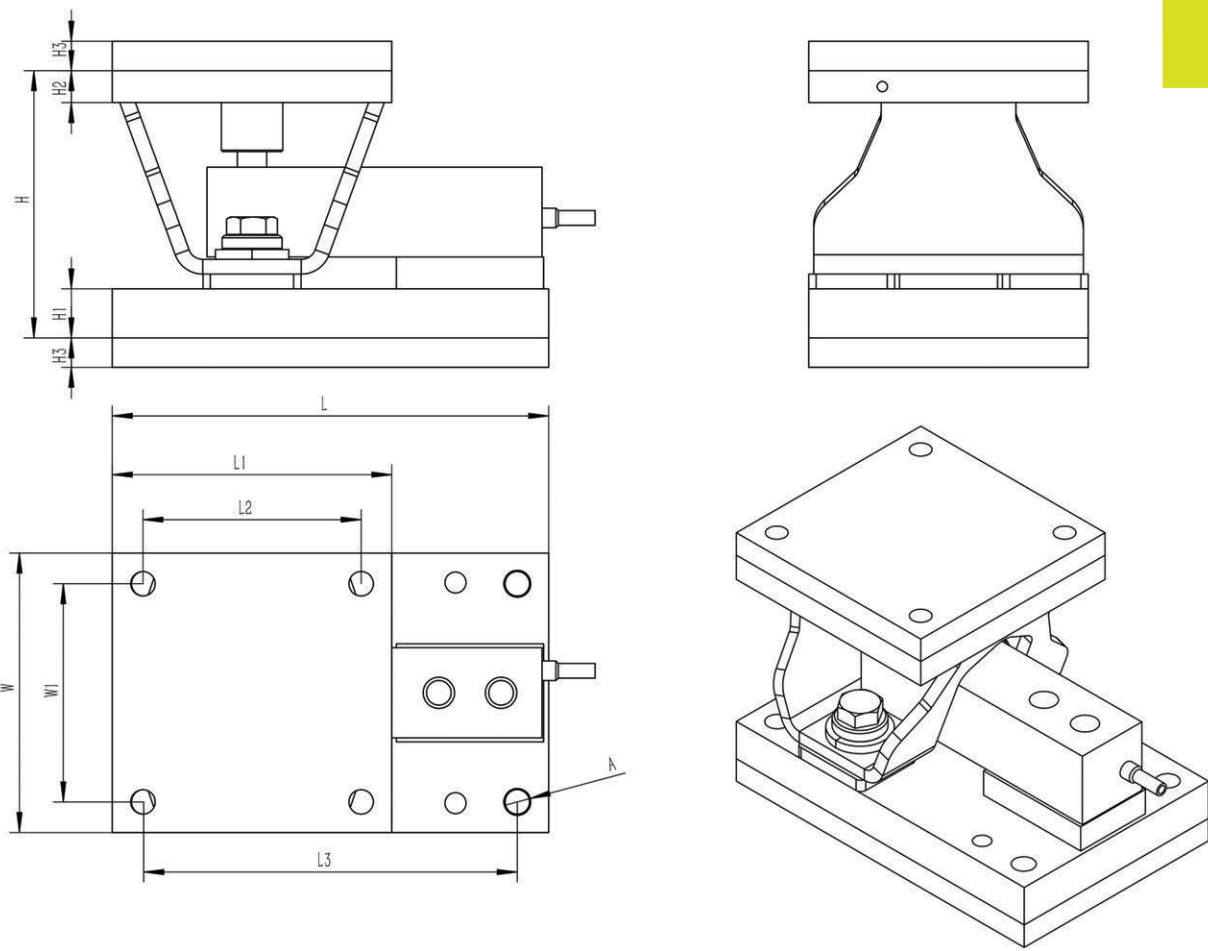

项目		尺寸/mm										
规格	额定载荷	W	W1	L	L1	L2	L3	H	H1	H2	H3	A
Size1	10~100KG	102	82	165	102	82	145	87	13	9	12	9
Size2	2T	114	89	178	114	89	152.4	109	20	13	16	11
Size3	3~5T	152	101.6	235	152	101.6	184.2	140	25	20	20	17

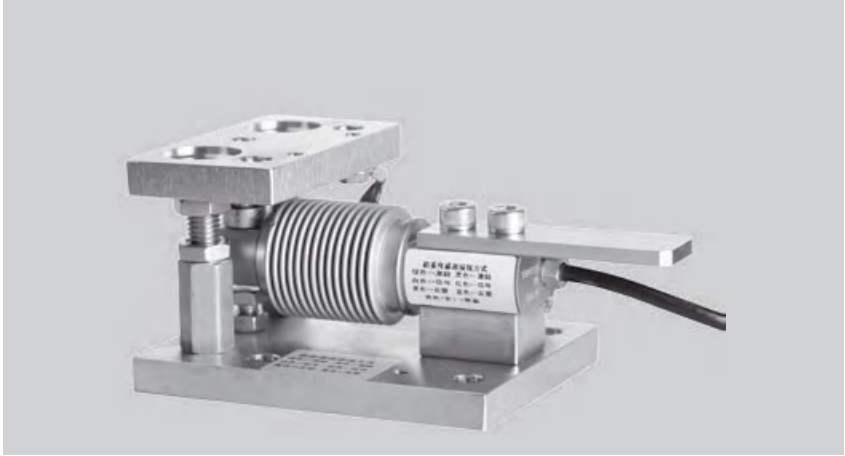

PT-UW Common Modules

PT-UW 普通模块

Features


- Stainless steel construction throughout
- Protection class IP68
- Use in tough environment
- Spherical fittings keep the vertical weighing state
- Support bolt to avoid overturn
- Easy to install
- Easy to maintain
- Suitable for weighing control in chemical/food/medical industry,etc.

主要特点

- 采用不锈钢焊接密封传感器, 防护等级IP68可在各种恶劣环境下使用
- 球形连接件, 始终保持模块的垂直称重状态
- 支撑螺栓, 防止设备倾覆
- 安装简单, 快速
- 维护方便, 节约停机维护时间
- 适用于化工、医药、食品、等行业的中小称量反应釜的配料称重控制

Schematic 接线方式


- | | |
|------------------|---------|
| • Green: +input | 绿色: +激励 |
| • Black: -input | 黑色: -激励 |
| • White: +output | 白色: +信号 |
| • Red: -output | 红色: -信号 |
| • Yellow: +sense | 黄色: +反馈 |
| • Blue: -sense | 蓝色: -反馈 |

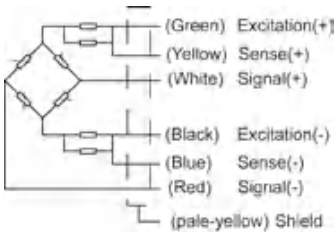


Capacities 额定称量


- 5Kg, 10Kg, 20Kg, 30Kg, 50Kg, 75Kg, 100Kg,
- 200Kg, 300Kg, 500Kg

Dimensions 尺寸

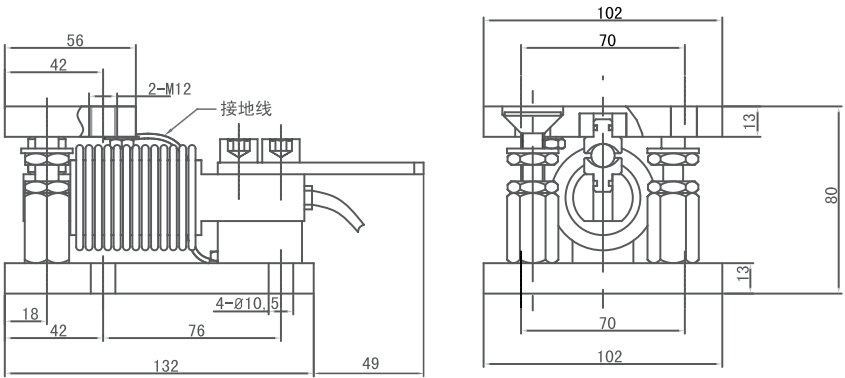

Installation 安装方式

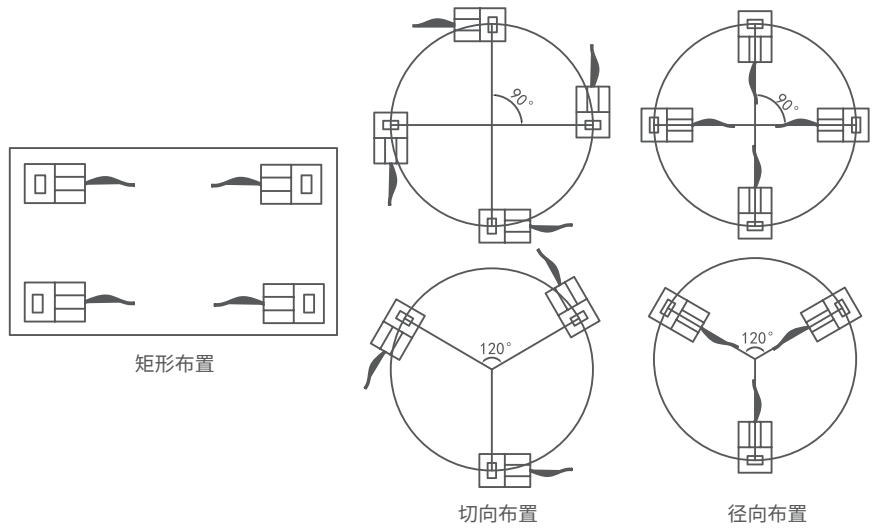

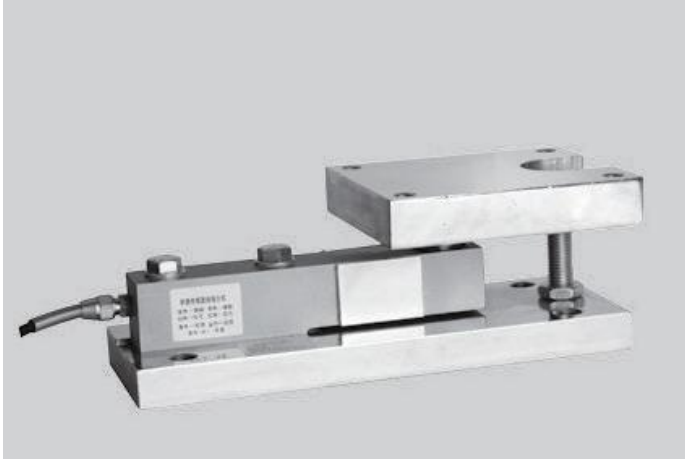

PT-FW Static Load Modules

PT-FW 静载模块

Features ▼

- High accuracy
- Mounts to tanks directly
- Support bolt to avoid overturn
- Alloy steel plated with nickel
- Easy to install
- Easy to maintain
- Suitable for weighing control of tanks


主要特点 ▼

- 使用优质传感器，称量精度高
- 结构独特，可方便地安装在各种槽罐上
- 支撑螺栓，防止设备倾覆
- 优质合金钢，表面镀镍
- 安装简单、快速
- 维护方便，节约停机维护时间
- 适用于槽罐的配料过程称重控制

Schematic ▼

接线方式 ▼

- Green: +input 绿色: +激励
- Black: -input 黑色: -激励
- White: +output 白色: +信号
- Red: -output 红色: -信号
- Yellow: +sense 黄色: +反馈
- Blue: -sense 蓝色: -反馈




Capacities ▼

额定称量 ▼

- 0.5t, 1t, 2t, 3t, 5t, 10t, 15t, 20t

Dimensions ▼


尺寸 ▼

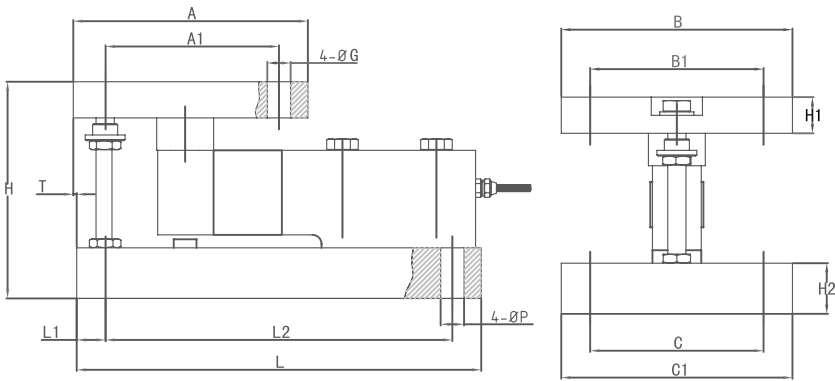

称量 (t)	L	L1	L2	A	A1	B	B1	C	C1	H	H1	H2	ØG	ØP	T
0.3~3	286	32	226	150	124	128	102	112	80	102	28	23	11	13	3
5	317.5	32	257	178	146	152	120	152	102	130	38	30	17.5	17	3
10	360	32	295	184	152	154	122	154	106	168	45	45	22	21	3
15~20	400	25	350	220	170	220	170	220	170	213	55	55	26	26	0

Installation ▼

安装方式 ▼

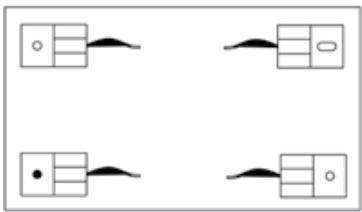


矩形布置




固定式

半浮动式

浮动式

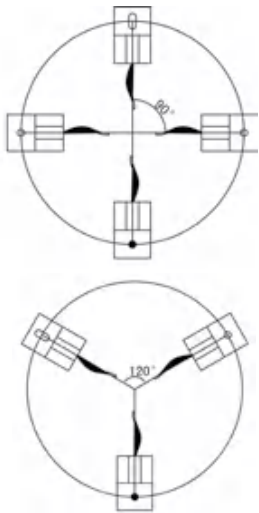

径向布置

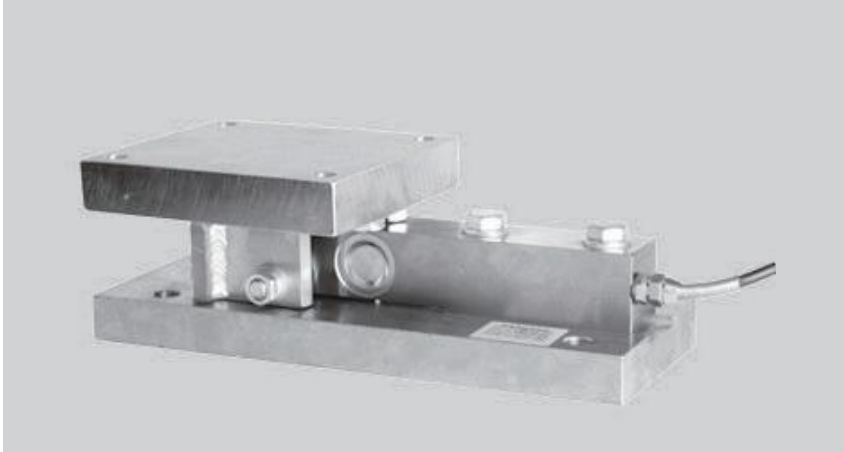

PT-CW Dynamic Load Modules

PT-CW 动载模块

Features ▼

- High accuracy
- Self-stabilized bearing head
- Adjustable bolt to stop block
- Contraposition tool makes proper working space of module
- Alloy steel plated with nickel
- Easy to install
- Easy to maintain
- Suitable for process weighing control in impact occasions


主要特点 ▼

- 使用优质传感器，称量精度高
- 自稳定承压头设计，始终保持正确的加载位置，称量重复性好
- 配备可调式水平限位螺栓
- 配备对位工具，保证模块正确的工作位置
- 优质合金钢，表面镀镍
- 安装简单、快速
- 维护方便，节约停机维护时间
- 适用于如输送滚道秤等有水平冲击力场合的称重和过程称重控制

Schematic ▼

接线方式 ▼

- Red: +input 红色: +激励
- Black: -input 黑色: -激励
- Green: +output 绿色: +信号
- White: -output 白色: -信号

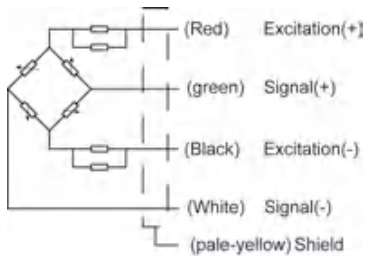


Capacities ▼

额定称量 ▼


- 0.5t, 1t, 2t, 3t, 5t, 8t, 10t, 15t, 20t

Dimensions ▼ 尺寸 ▼

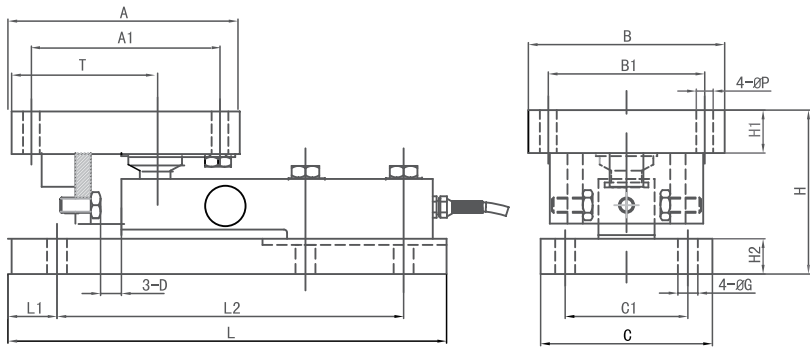


称量(t)	L	L1	L2	A	A1	B	B1	C	C1	H	H1	H2	T	ØP	ØG	D
0.5~3	286	32	226	150	124	128	102	112	80	106.9	28	23	96	11	13	1.6
5	317.5	32	257	178	146	152	120	152	102	146.2	38	30	99	17.5	17	1.6
10	360	32	295	184	152	154	122	154	106	215.7	45	45	105	22	21	3
15~20	400	25	350	220	170	220	170	220	170	255.7	55	55	115	26	26	3

Installation ▼ 安装方式 ▼

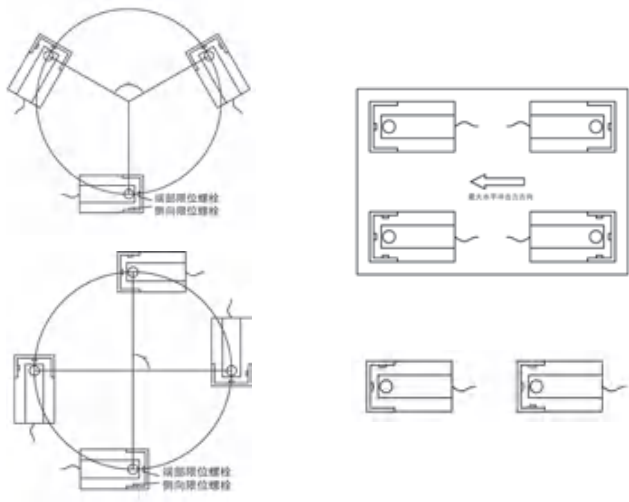

注意：在同一方向上仅有两只模块承受冲击时，两只模块应位于秤的同侧

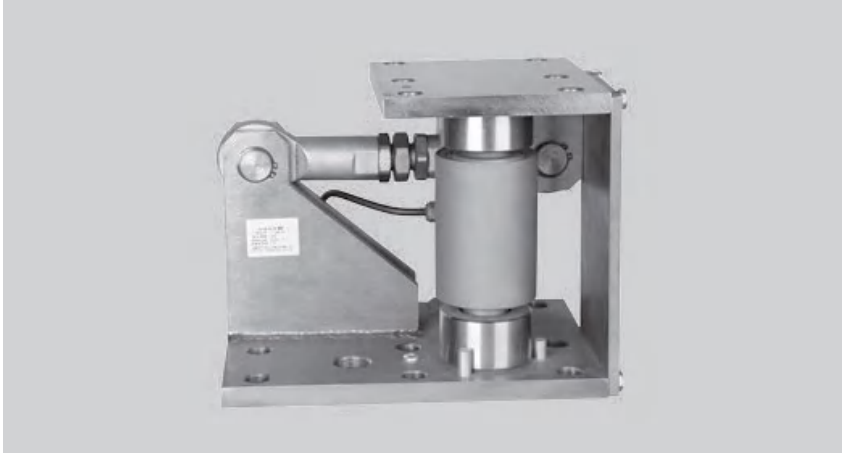

PT-GW Post Type Modules

PT-GW 柱式模块

Features ▼

- Big capacity
- overload protection device
- Stainless steel construction throughout
- Protection class IP68
- Use in tough environment
- Spherical fittings keep the vertical weighing state
- Support bolt to avoid overturn
- Easy to install
- Easy to maintain
- Suitable for weighing control of tanks


主要特点 ▼

- 大容量, 自重小
- 自带安全支承快标记, 用于过载保护
- 采用不锈钢焊接密封传感器, 防护等级IP68, 可在各种恶劣环境下使用
- 安装简单、快速
- 维护方便, 节约停机维护时间
- 适用于恶劣环境下, 大吨位槽罐的配料称重控制

Schematic ▼

接线方式 ▼

- | | |
|------------------|---------|
| • Green: +input | 绿色: +激励 |
| • Black: -input | 黑色: -激励 |
| • White: +output | 白色: +信号 |
| • Red: -output | 红色: -信号 |
| • Yellow: +sense | 黄色: +反馈 |
| • Blue: -sense | 蓝色: -反馈 |




Capacities ▼

额定称量 ▼




- 15t, 20t, 30t, 50t, 100t

Dimensions ▼ 尺寸 ▼


GW15~50t



GW100t



Installation ▼ 安装方式 ▼

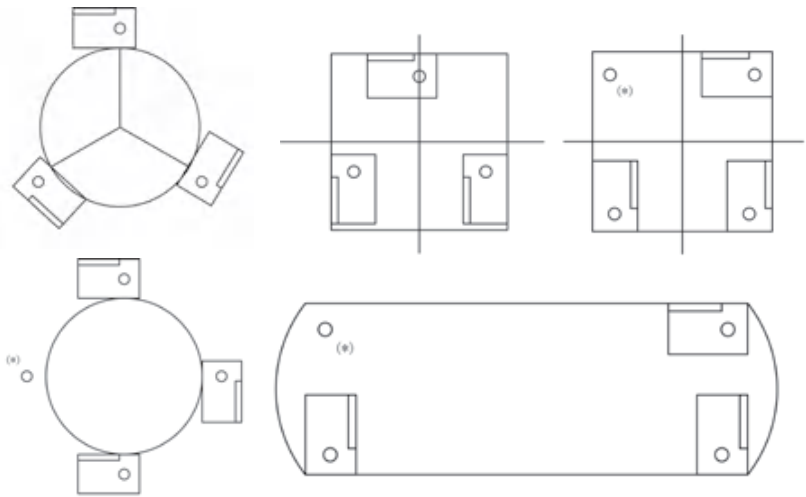

(*)矩形分布时, 四只GW模块中有一块应去掉侧向限位



PT-FWQ Full Floating Modules

PT-FWQ 全浮式模块

Features ▾

- Alloy steel construction throughout
- Mounts to floor or structural support directly
- SQB (single ended shear beam load cell) installed
- Support bolt to avoid overturn
- Protected against corrosion by nickel-plated treatment
- Suitable for floor scales, blending & mixing systems and batching systems, etc.

主要特点 ▾


- 优质合金钢结构
- 可直接安装在地上或者基础结构上
- 使用悬臂梁SQB称重传感器
- 表层镀镍防腐处理
- 适用于平台秤、搅拌站和配料秤等特点

Schematic ▾

- Red: +input
- Black: -input
- Green: +output
- White: -output

接线方式 ▾


- 红色: +激励
- 黑色: -激励
- 绿色: +信号
- 白色: -信号

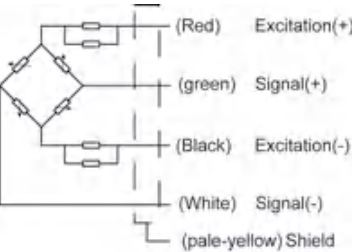


Capacities ▾

- 100Kg, 200Kg, 250Kg, 300Kg, 0.5t, 1t, 2t, 3t

Dimensions ▾ 尺寸 ▾

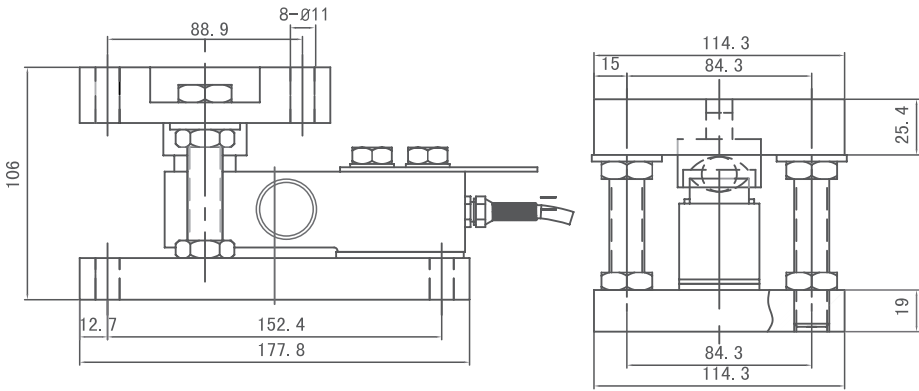

Installation ▾ 安装方式 ▾

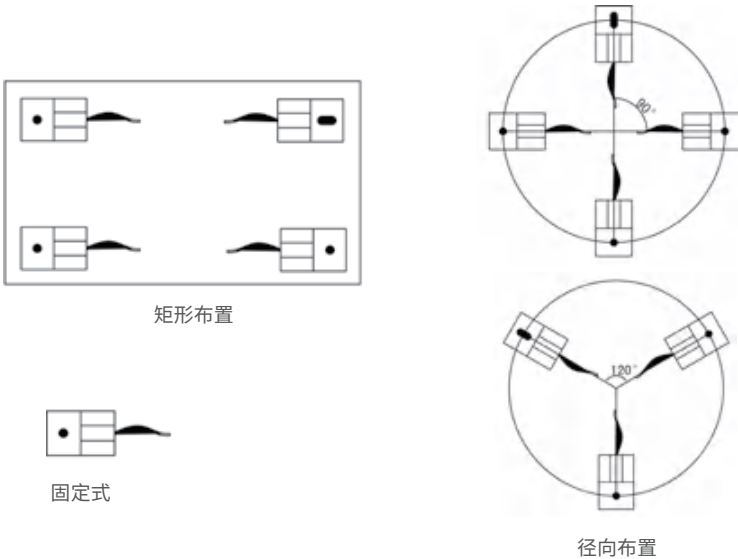



WB Weighing Bridge

WB 系列汽车衡

- WB modularized weighing bridge adopts SCAIME digital or analog load cells. You could also choose the load cell you prefer. Smooth or checkered plate upon your requirement, customized color, and your brand logo could be also printed onto the scale body. WB series have computer, printer and weighing managing software for your selection
- 模块化结构汽车衡，安装无须翻转秤体，花纹板面板（可选配光板），推荐使用法国世感数字式或模拟式传感器，也可以选配中航电测，柯力或者其他品牌传感器。计算机，打印机，称重管理软件等周边设备可根据客户要求选配。
- 容量:** 200吨（可根据客户需求定制特殊量程）
- 主要配置:** 法国世感模拟式传感器：CB50X~C4-5/60t-BLD
数字式传感器：CB50XDL-C4-20/50t-BLD
防护等级IP68（可选配其他品牌传感器）
- 主要功能:** 普通称重/检重/累计打印
- 主要特点:** 模块化设计/安装无须翻转秤体
- 适用场所:** 置于地面/户外使用/工厂车间使用/潮湿环境使用
- 行业应用:** 建筑/仓储/物流/金属/公路/化工
- Capacity:** 200t (special capacities upon request)
- Configuration:** SCAIME CB50 series load cell is highly recommended. (special load cell upon request)
- Main Function:** Truck weighing/Check weighing/Total/Print
- Main Feature:** Modularized body/No overturn during installation
- Sites Application:** Pit or pit type/Outdoors/Factory plant/Moisture circumstance
- Industry Application:** Building construction/Warehouse/Logistics/Metal/Chemical industry/Highway

MODEL 型号		DIMENSION 台面规格 (宽×长m)	CAPACITY 最大称量	DIVISION 分度值	AXLE LOAD 允许轴载
Digital数字式	Analog模拟式				
WBD-30	WBA-30	3×6,3×10,3×12,3×14,3×15	30t	10kg	20t
WBD-50	WBA-50	3×12,3×14,3×15,3×16,3×18	50t	20kg	25t
WBD-60	WBA-60	3×12,3×14,3×15,3×16,3×18	60t	20kg	25t
WBD-80	WBA-80	3×15,3×16,3×18	80t	20kg	40t
WBD-100	WBA-100	3×15,3×16,3×18,3×20	100t	20kg	40t
WBD-120	WBA-120	3×18,3×20,3×21,3×22	120t	50kg	45t
WBD-150	WBA-150	3×18,3×20,3×21,3×22,3×24	150t	50kg	60t
WBD-100	WBA-100	3.4×15,3.4×16,3.4×18,3.4×20,3.4×21,3.4×22,3.4×24	100t	20kg	40t
WBD-120	WBA-120	3.4×18,3.4×20,3.4×21,3.4×22,3.4×24	120t	50kg	45t
WBD-150	WBA-150	3.4×18,3.4×20,3.4×21,3.4×22,3.4×24	150t	50kg	60t
WBD-200	WBA-200	3.4×18,3.4×20,3.4×21,3.4×22,3.4×24	200t	50kg	90t



关注细节

All Details
Of The Production
Process



PRECISION, BEYOND IMAGINATION

精工细作 · 近乎苛求